ExciStar

Compact, High Repetition Rate Excimer Laser

ExciStar excimer lasers are table top-size lasers designed for easy system integration. The proven ALMETA tube design ensures industrial-grade performance and endurance. Thousands of ExciStar lasers serve a broad range of delicate tasks including cornea ablation, prescription lens marking, and optical sensor manufacturing.

Features and Benefits

- Ultrashort 193 nm and 248 nm wavelengths for superior ablation and marking
- High repetition rate to enable fast and flexible processing
- Ultimate pulse control to ensure effective use of photons
- ALMETA tube with integrated heating device to ensure reproducible results
- Air-cooled, single-phase design, premix gas supply and CEdeclaration compliance for easy integration

Applications

- · LASIK Vision Correction
- · UV Precision Marking
- · LA-ICP-MS Analysis
- FBG Writing






	ExciStar					
	200 200		500 500		1000 1000	
Maximum Repetition Rate (Hz)						
Wavelength (nm)	193	248	193	248	193	248
Nominal Pulse Energy (mJ)	5	10	5	10	5	10
Maximum Pulse Energy (mJ)	12	16	12	16	12	16
Nominal Power¹ (W)	1	2	2.5	5	5	10
Beam Dimension¹ (FWHM, mm, V x H)	(5.8 ±0.5) x (2.6 ±0.5)	(5.6 ±0.5) x (2.6 ±0.5)	(5.8 ±0.5) x (2.6 ±0.5)	(5.6 ±0.5) x (2.6 ±0.5)	(5.8 ±0.5) x (2.6 ±0.5)	(5.6 ±0.5) x (2.6 ±0.5)
Beam Divergence ¹ (FWHM, mrad, V x H)	<3.0 x 1.5					
Energy Stability (sigma, %)	<2 (valid for ≥ nominal pulse energy at different wavelengths)					
Duty Cycle ¹ (steady operation)	unlimited		limited (up 25 minutes)		limited (up to 10 minutes)	
Pulse Duration (FWHM, ns)	7 ±2	10 ±3	7 ±2	10 ±3	7 ±2	10 ±3
Cooling	Air					
Weight	66 kg (145.5 lbs.)					
Laser Dimensions (L x W x H)	650 x 300 x 400 mm (25.6 x 11.8 x 15.75 in.)					
Electrical	230 V, 50/60 Hz, single phase					

¹ Valid for nominal pulse energy and, maximum repetition rate.

TYPICAL PERFORMANCE DATA


ExciStar Performance at 193 nm and 248 nm/500 Hz

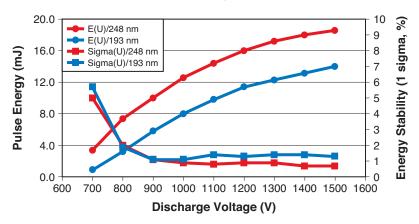




MECHANICAL SPECIFICATIONS

ExciStar

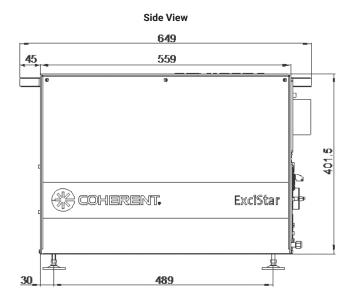

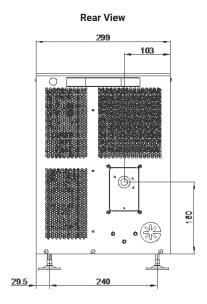




Coherent, Inc.,

5100 Patrick Henry Drive Santa Clara, CA 95054 p. (800) 527-3786 | (408) 764-4983 f. (408) 764-4646 Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all ExciStar Lasers. For full details of this warranty coverage, please refer to the Service section at www.coherent.com or contact your local Sales or Service Representative.

MC-013-07-0M0322Rev.E Copyright @2022 Coherent, Inc.





VISIBLE AND INVISIBLE LASER RADIATION. AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION. CLASS IV LASER RADIATION PRODUCT PER EN/IEC 60825-1 (2014)

MAX. AVERAGE POWER: 18 W
MAX. OUTPUT ENERGY: 25 mJ/pulse
PULSE DURATION: 3 to 15 ns
WAVELENGTH: 157 to 351 nm, 620 to 800 nm