



DC Series

High power CO₂ Slab Laser

Coherent DC Series high power CO₂ lasers offer an unmatched combination of economy and reliability for a variety of materials processing tasks, including cutting, welding and surface treatment. Plus, their far infrared output wavelength makes them compatible with a wide range of materials, including metals, wood, plastics, textiles, paper and carbon fiber reinforced polymers (CFRPs).

These lasers employ a slab discharge design, which is simpler and produces better output characteristics than the fast flow construction traditionally utilized in multi-kilowatt CO₂ lasers. The sealed, slab discharge configuration avoids optics contamination, and eliminates the complexity, cost and reliability issues of blowers for gas recirculation. All this means substantially lower operating costs, greater reliability, longer lifetimes and extended intervals between maintenance.

FEATURES & BENEFITS

- Output power: 1000 - 8,000 Watts
- Wavelength 10.6 µm
- Minimal gas consumption due to diffusion cooling
- Low service requirements thanks to the robust, low-maintenance design
- Available configurations:
 - Compact Version: laser head and control cabinet in one unit
 - Head/cabinet combination
 - Integration modules

APPLICATIONS

- Cutting
- Welding
- Surface Treatment



SPECIFICATIONS	DC 010	DC 015	DC 020	DC 025
Nominal Power (W)	1000 W	1500 W	2000 W	2500 W
Power Range (%)		10 - 100		
Laser Beam Quality <i>ISO 11146, deviation ± 5 %</i>		K (M ²) = 0.95 (1.05)		
Power Stability (%) <i>Cooling water Δ T ≤ ± 1 K</i>		± 2		
Pointing stability (mrad) <i>ISO 11145</i>		≤ 0.15		
Pulse Frequency Range		CW or 2 - 5000 Hz		
Beam diameter (mm)	18 ± 3*		20 ± 3*	
Polarization		linear, 45° parallel to base		
Wavelength		10.6 μm		
Excitation		RF		
ELECTRICAL RATINGS				
Voltage	3 x 230 /400 V ± 10%, 3 x 255/440 V ±10% or 3 x 277 / 480 V ± 10%; 50/60 Hz; 3 Phases; PE			
Connected Load (kVA)	16	22	35	41
Effective Power at Nominal Power (kW)	15	21	34	39
Max. Current Consumption at 400 V (A)	< 25	< 35	< 51	< 59
Fuses Type NH (A)	50		80	
COOLING				
Recommended Cooling Capacity* (kW)	≥ 15	≥ 21	≥ 34	≥ 39
Flow rate laser head (l/h)	≥ 3000	≥ 4000	≥ 4000	≥ 5000
Flow rate laser cabinet (l/h)		≥ 500		
Flow rate laser Compact (l/h)	≥ 3500	≥ 4500	≥ 4500	≥ 5500
Temperature (°C) Θ**		20 to 27 (above dew point)		
Temperature Tolerance Range (°C)		±1		
Supply Pressure (hPa)		≤ 6000 (6 bar)		
Back Pressure (hPa)		≤ 1500 (1.5 bar)		
LASER GAS				
Type		ROFIN-SINAR Premix		
Consumption (NI/h)		< 0.06		
Change interval (h)		168		
DIMENSIONS & WEIGHTS				
Standard Laser head (L x W x H) (mm)		1685 x 800 x 850		
Weight (kg)	520		565	
Control cabinet (W x D x H) (mm)		1200 x 689 x 2062		
Weight (kg)	575		670	
Compact Laser (L x W x H) (mm)		1880 x 881 x 1863		
Weight (kg)	1310		1380	
ENVIRONMENTAL CONDITIONS				
Ambient Temperature (°C)		5 - 40		
Humidity (°C)		dew point below the cooling water		
CUSTOMER INTERFACE				
	Commands from external controller / control panel, status signals to external controller, external pulse interface, external analog and digital power control, Ethernet Interface			

* Please contact COHERENT for detailed data of the beampropagation.

** $\frac{\Delta\theta}{\Delta t} \leq 3^\circ/\text{min}$; T > 1.5 min

SPECIFICATIONS	DC 030	DC 035	DC 040
Nominal Power (W)	3000	3500	4000
Power Range (%)		10 - 100	
Laser Beam Quality <i>ISO 11146, deviation ± 5 %</i>		K (M ²) = 0.95 (1.05)	
Power Stability (%) <i>Cooling water Δ T ≤ ± 1 K</i>		± 2	
Pointing stability (mrad) <i>ISO 11145</i>		≤ 0.15	
Pulse Frequency Range		CW or 2 - 5000 Hz	
Beam diameter (mm)		25 mm ± 3*	
Polarization		linear, 45° parallel to base	
Wavelength		10.6 μm	
Excitation		RF	
ELECTRICAL RATINGS			
Voltage	3 x 230 /400 V ± 10%, 3 x 255/440 V ±10% or 3 x 277 / 480 V ± 10%; 50/60 Hz; 3 Phases; PE		
Connected Load (kVA)	48	56	60
Effective Power at Nominal Power (kW)	46	52	57
Max. Current Consumption at 400 V (A)	< 70	< 81	< 87
Fuses Type NH (A)	100		125
COOLING			
Recommended Cooling Capacity* (kW)	≥ 46	≥ 52	≥ 57
Flow rate laser head (l/h)		≥ 5000	
Flow rate laser cabinet (l/h)		≥ 500	
Flow rate laser Compact (l/h)		≥ 5500	
Temperature (°C) Θ**		20 to 27 (above dew point)	
Temperature Tolerance Range (°C)		±1	
Supply Pressure (hPa)		≤ 6000 (6 bar)	
Back Pressure (hPa)		≤ 1500 (1.5 bar)	
LASER GAS			
Type		ROFIN-SINAR Premix	
Consumption (NI/h)	< 0.08		< 0.09
Change interval (h)		168	
DIMENSIONS & WEIGHTS			
Standard Laser head (L x W x H) (mm)		2085 x 850 x 850	
Weight (kg)	approx. 675		approx. 685
Control cabinet (W x D x H) (mm)		1200 x 689 x 2062	
Weight (kg)	approx. 670		approx. 750
Compact Laser (L x W x H) (mm)		2280 x 976 x 1863	
Weight (kg)	approx. 1610		approx. 1670
ENVIRONMENTAL CONDITIONS			
Ambient Temperature (°C)		5 - 40	
Humidity (°C)		dew point below the cooling water	
CUSTOMER INTERFACE			
	Commands from external controller / control panel, status signals to external controller, external pulse interface, external analog and digital power control, Ethernet Interface		


* Please contact COHERENT for detailed data of the beampropagation.

** $\frac{\Delta\theta}{\Delta t} \leq 3\%/\text{min}$; T > 1.5 min



SPECIFICATIONS	DC 050	DC 060	DC 080
Nominal Power (W)	5000	6000	8000
Power Range (%)	20 - 100		15 - 100
Laser Beam Quality <i>ISO 11146, deviation ± 5 %</i>		K (M ²) = 0.95 (1.05)	
Power Stability (%) <i>Cooling water Δ T ≤ ± 1 K</i>		± 2	
Pointing stability (mrad) <i>ISO 11145</i>		≤ 0.15	
Pulse Frequency Range		CW or 2 - 100 Hz	
Beam diameter (mm)		25 mm ± 3*	
Polarization		linear, 45° parallel to base	
Wavelength		10.6 μm	
Excitation		RF	
ELECTRICAL RATINGS			
Voltage	3 x 230 /400 V ± 10% or 3 x 277 / 480 V ± 10%; 50/60 Hz; 3 Phases; PE;		
Connected Load (kVA)	76	90	107
Effective Power at Nominal Power (kW)	71	85	102
Max. Current Consumption at 400 V (A)	< 110	< 130	< 154
Fuses Type NH (A)	160		200
COOLING			
Recommended Cooling Capacity* (kW)	≥ 71	≥ 85	≥ 102
Flow rate laser head (l/h)	≥ 6000	≥ 7500	≥ 9000
Flow rate laser cabinet (l/h)	≥ 800	≥ 800	≥ 1000
Flow rate laser Compact (l/h)	≥ 6800	≥ 8300	≥ 10000
Temperature (°C) Θ**	20 to 27 (above dew point)		
Temperature Tolerance Range (°C)	±1		
Supply Pressure (hPa)	≤ 6000 (6 bar)		
Back Pressure (hPa)	≤ 1500 (1.5 bar)		
LASER GAS			
Type	ROFIN-SINAR Premix		
Consumption (NI/h)	< 0.15	< 0.17	
Change interval (h)	168		
DIMENSIONS & WEIGHTS			
Standard Laser head (L x W x H) (mm)	2350 x 950 x 950	2600 x 950 x 945	
Weight (kg)	approx. 1000	approx. 1100	
Control cabinet (W x D x H) (mm)	1200 x 689 x 2062		1500 x 814 x 2062
Weight (kg)	approx. 800		approx. 1160
Compact Laser (L x W x H) (mm)	2520 x 1031 x 1963	2770 x 1031 x 1963	
Weight (kg)	approx. 2250	approx. 2300	approx. 2500
ENVIRONMENTAL CONDITIONS			
Ambient Temperature (°C)	5 - 40		
Humidity (°C)	dew point below the cooling water		
CUSTOMER INTERFACE			
	Commands from external controller / control panel, status signals to external controller, external pulse interface, external analog and digital power control, Ethernet Interface		

* Please contact COHERENT for detailed data of the beampropagation.

** $\frac{\Delta\theta}{\Delta t} \leq 3^\circ/\text{min}; T > 1.5 \text{ min}$

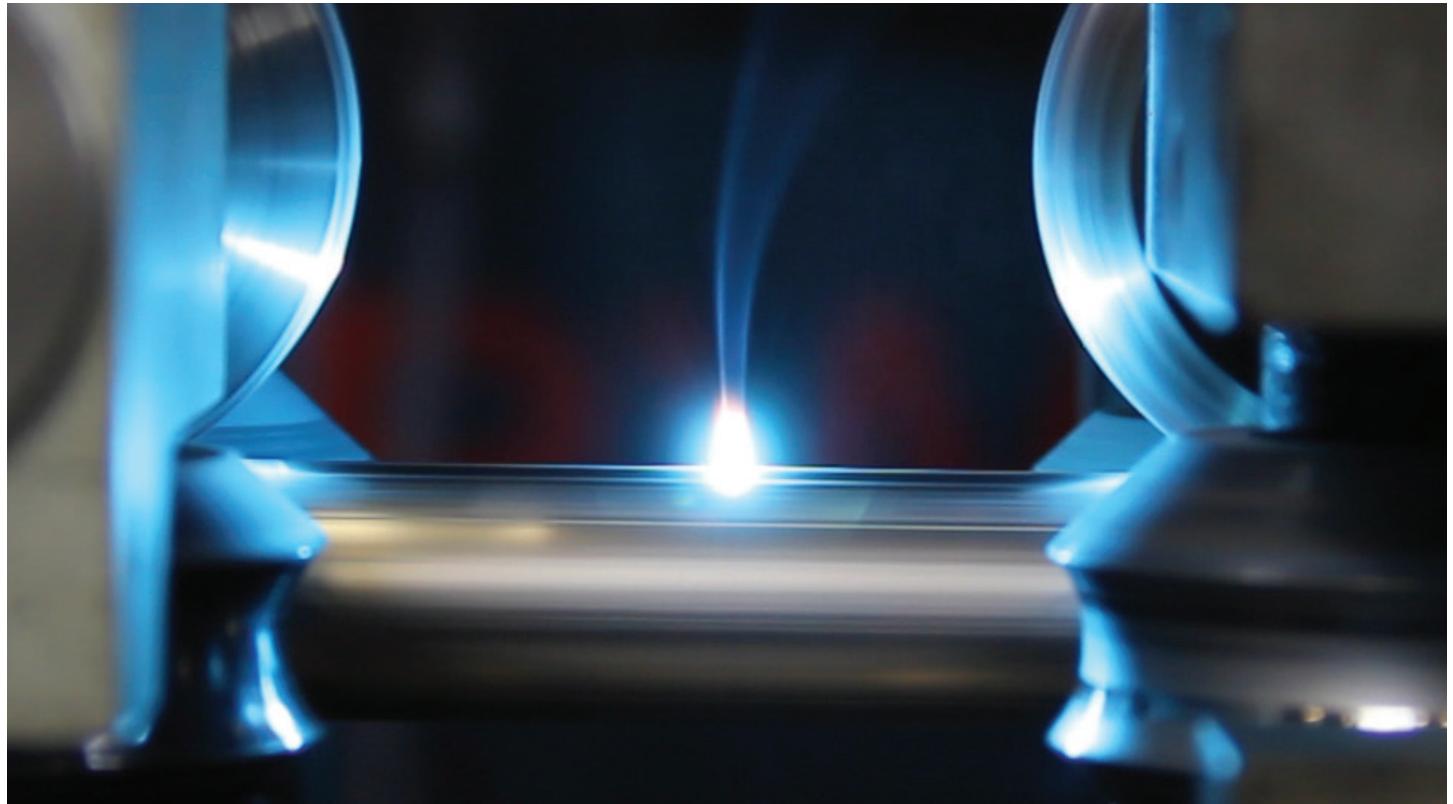




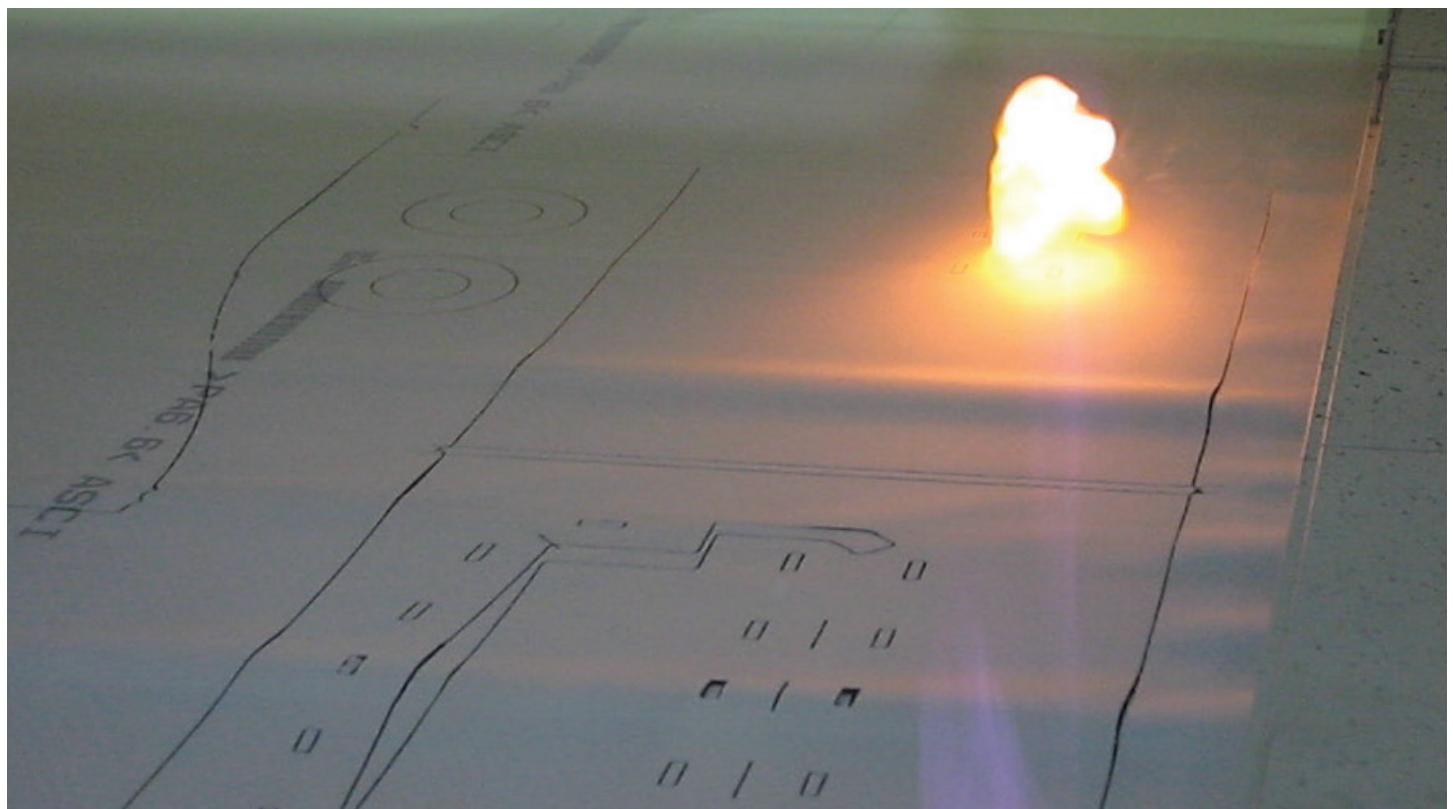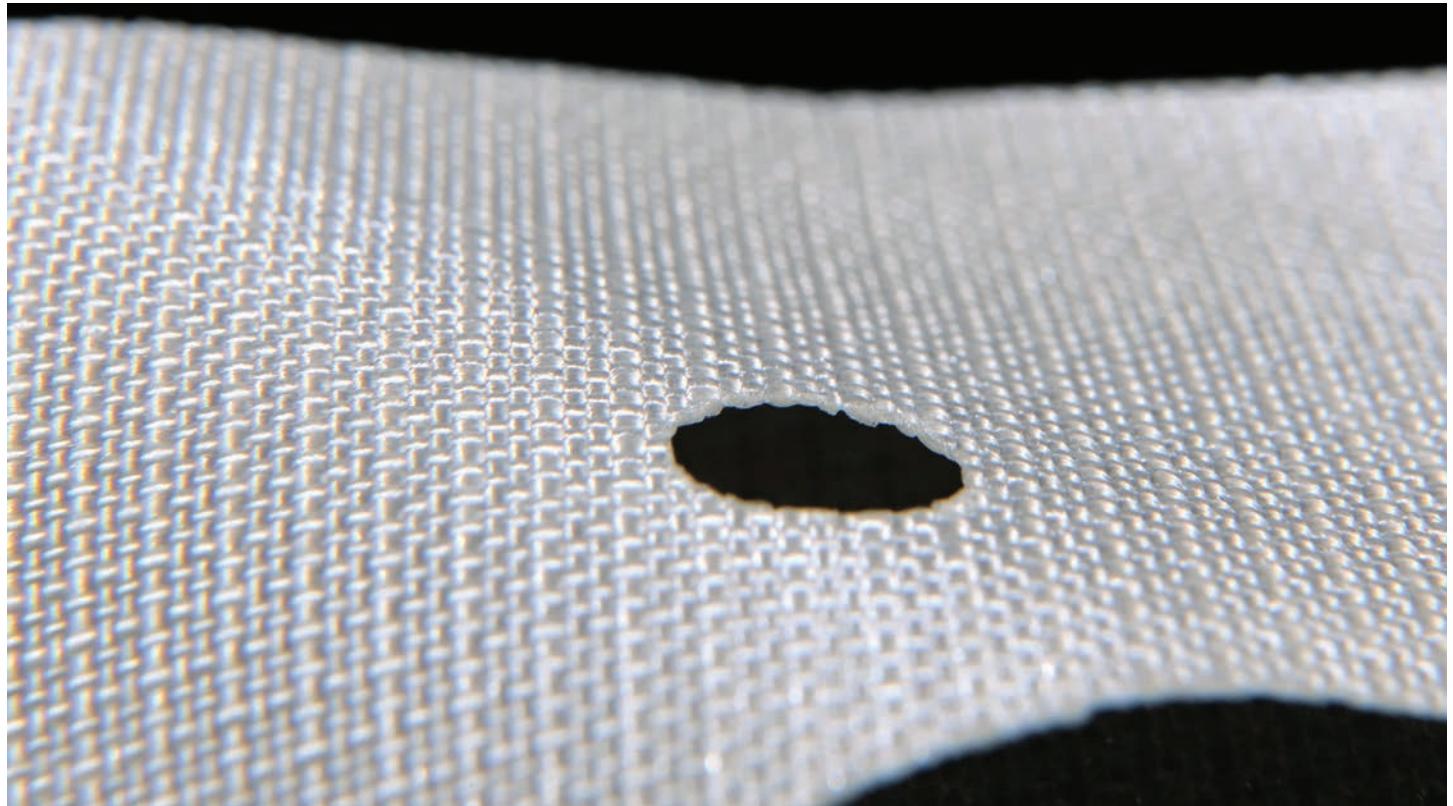


MECHANICAL SPECIFICATIONS

DC 010 - DC 025 Standard

Laser Head

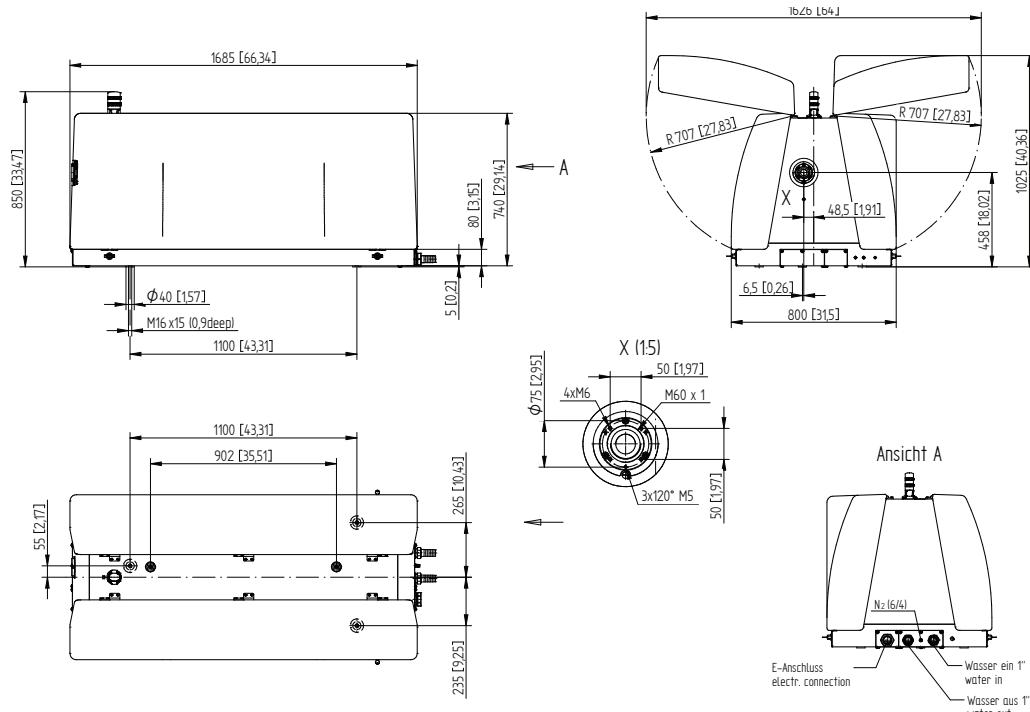


Cabinet

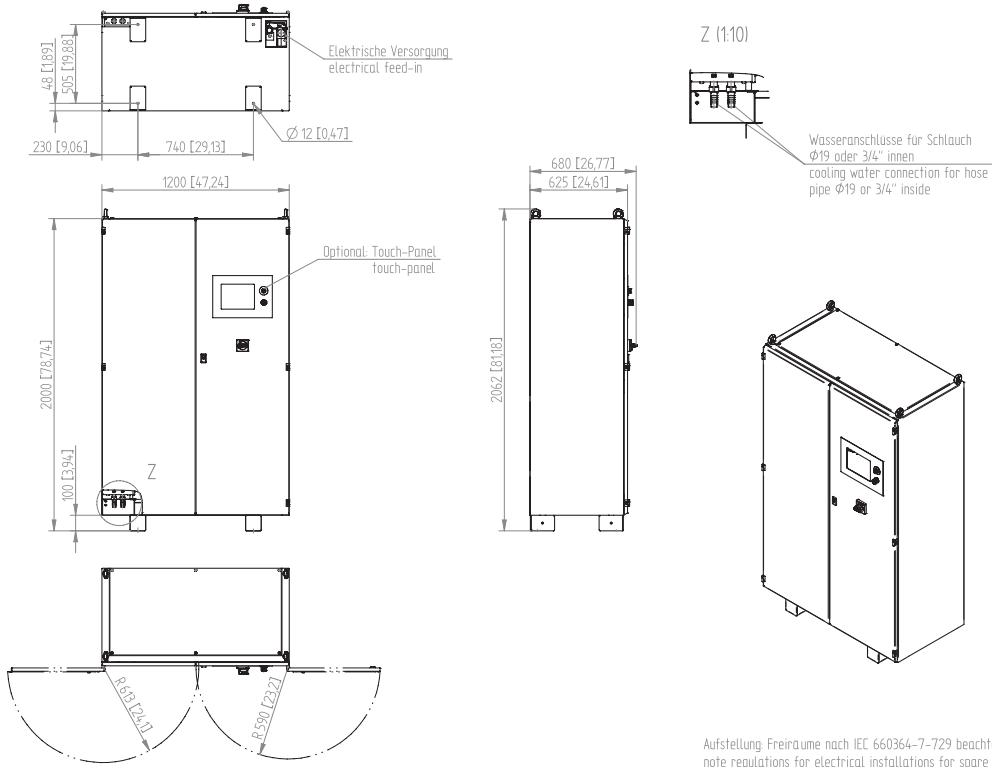

MECHANICAL SPECIFICATIONS


DC 010 - DC 025 Compact

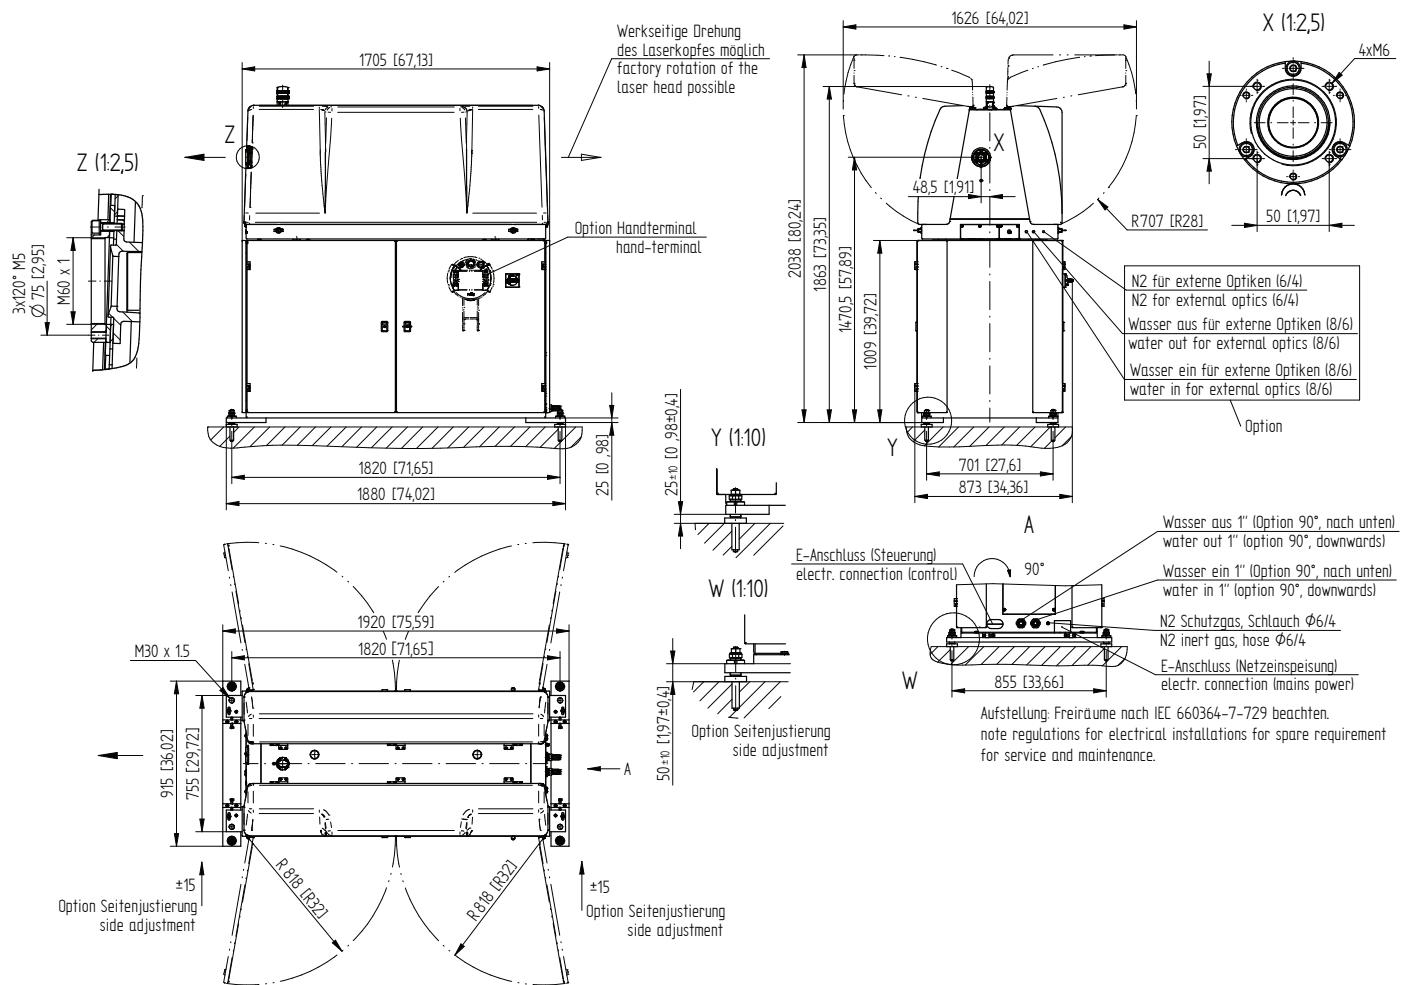


MECHANICAL SPECIFICATIONS

DC 030 - DC 040 Standard

Laser Head

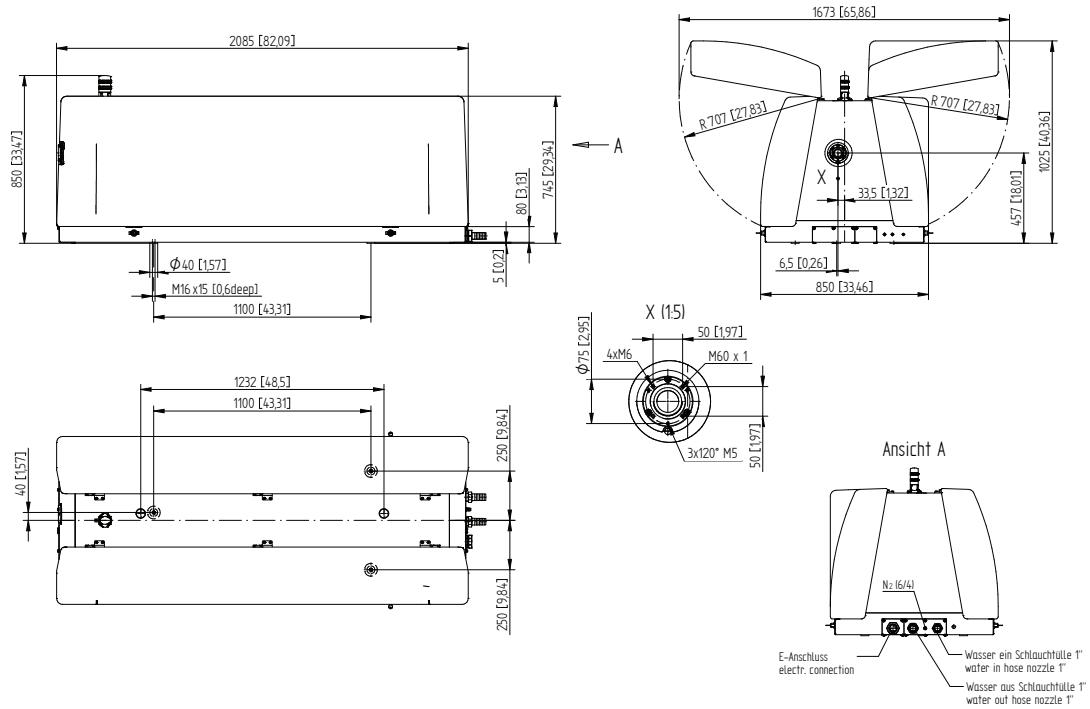


Cabinet

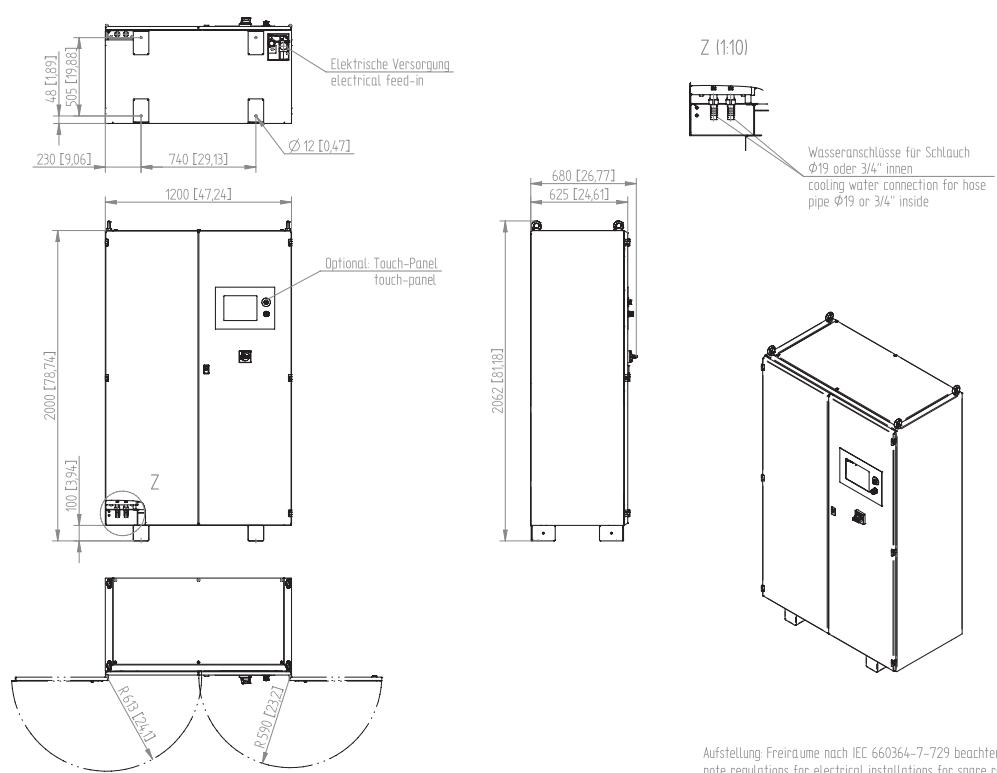

Aufstellung: Freiräume nach IEC 60364-7-729 beachten.
note regulations for electrical installations for spare requirement
for service and maintenance.

MECHANICAL SPECIFICATIONS


DC 030 - DC 040 Compact

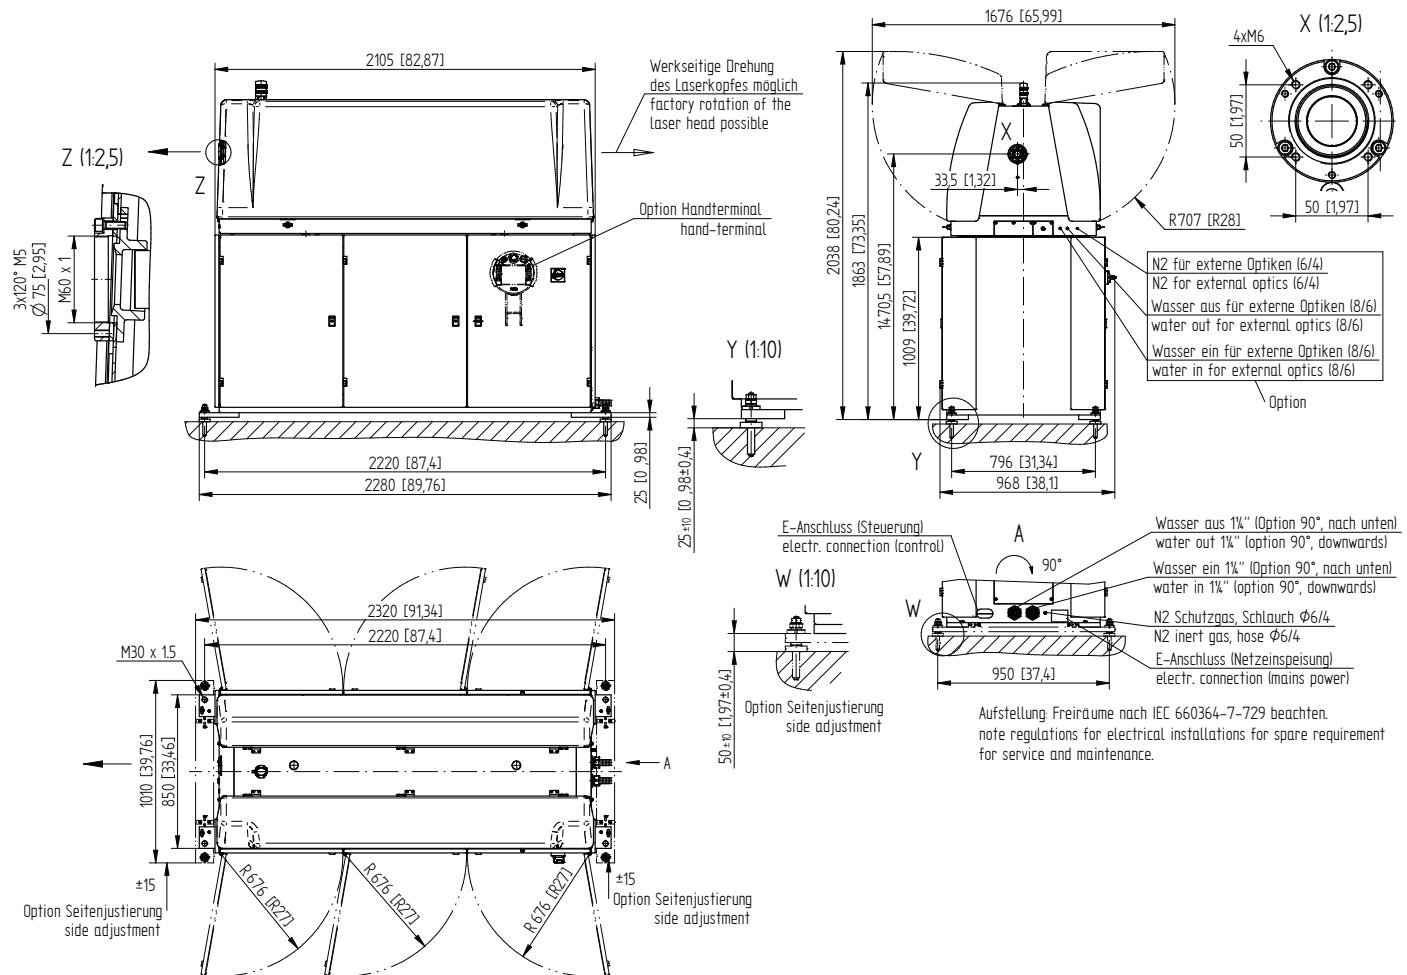


MECHANICAL SPECIFICATIONS

DC 050 Standard

Laser Head

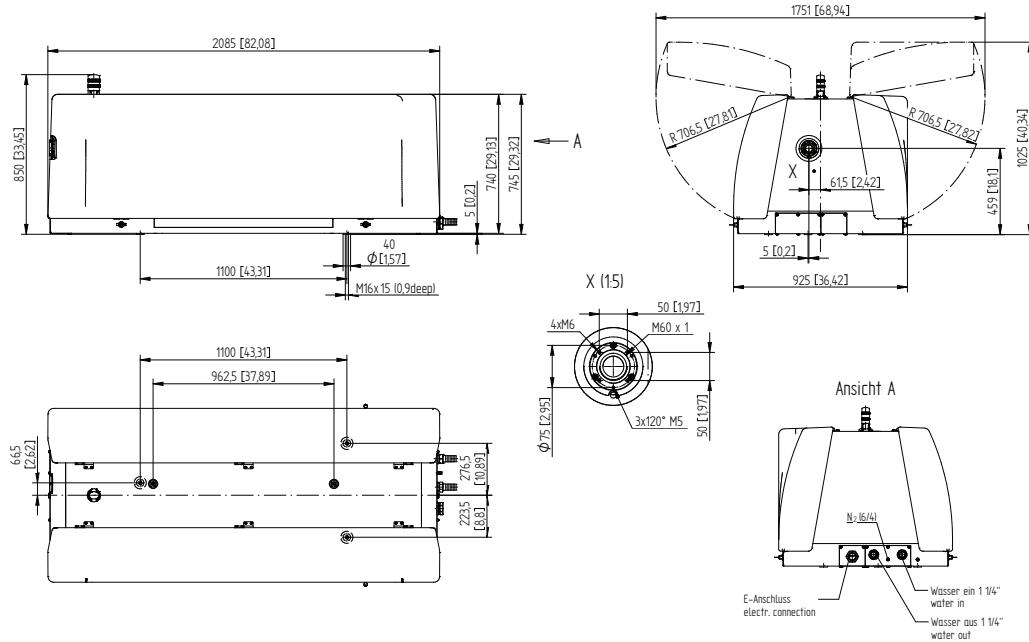


Cabinet

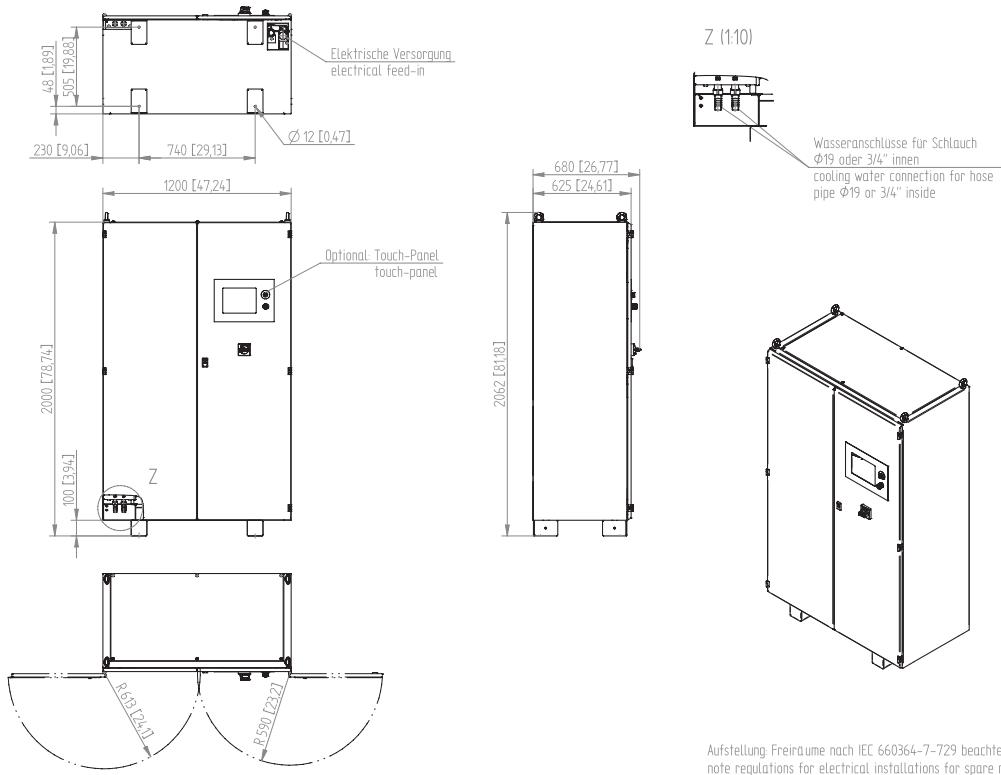

Aufstellung: Freiräume nach IEC 660364-7-729 beachten.
note regulations for electrical installations for spare requirement
for service and maintenance.

MECHANICAL SPECIFICATIONS


DC 050 Compact

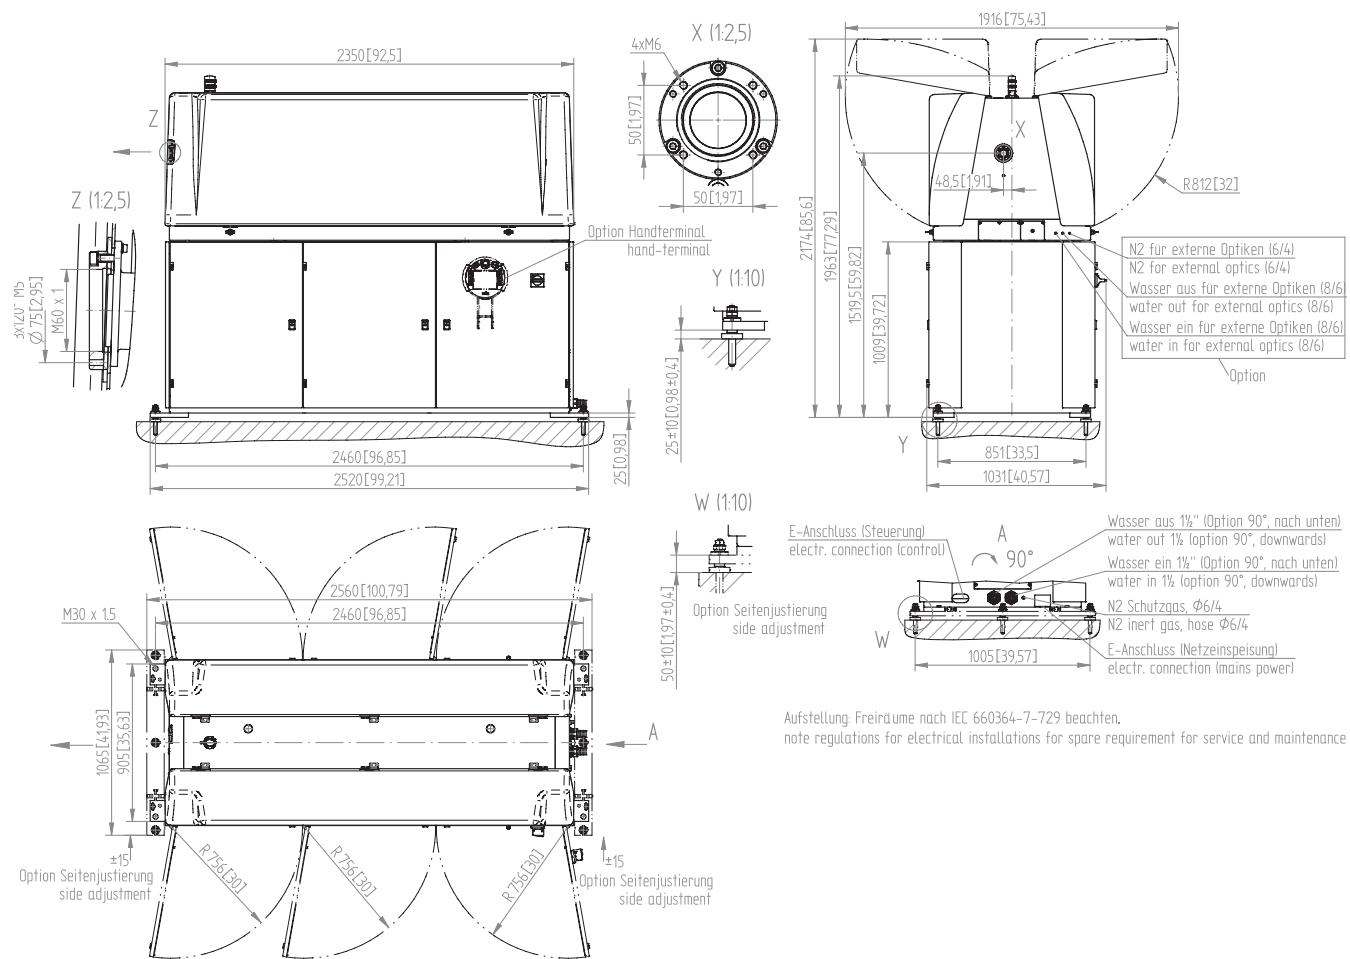


MECHANICAL SPECIFICATIONS

DC 060 Standard

Laser Head

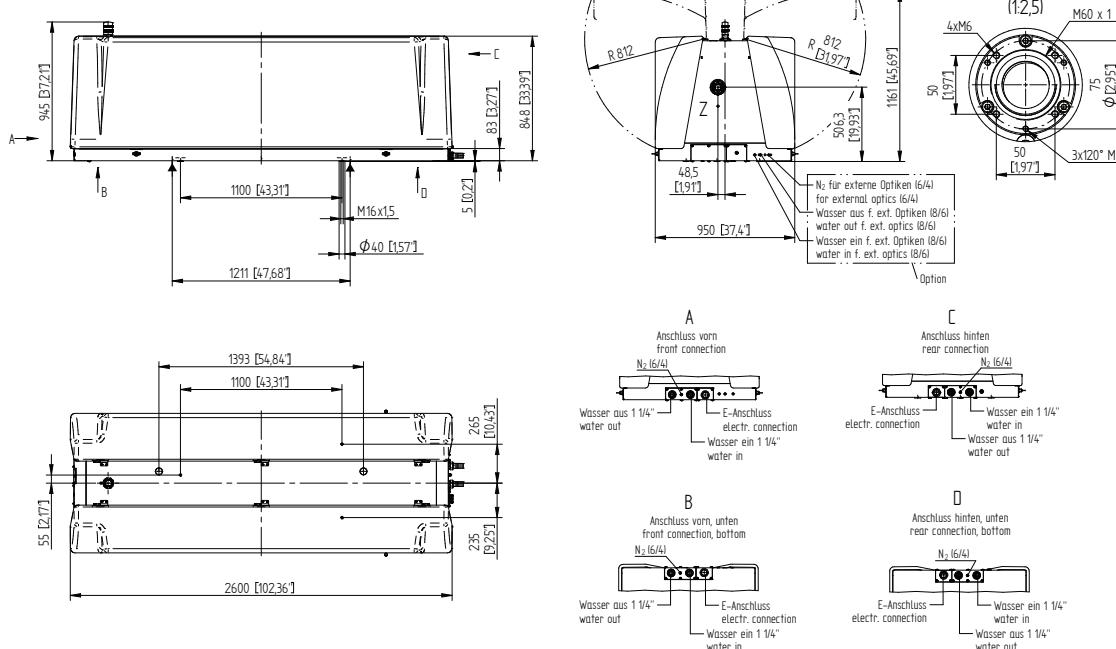

Cabinet

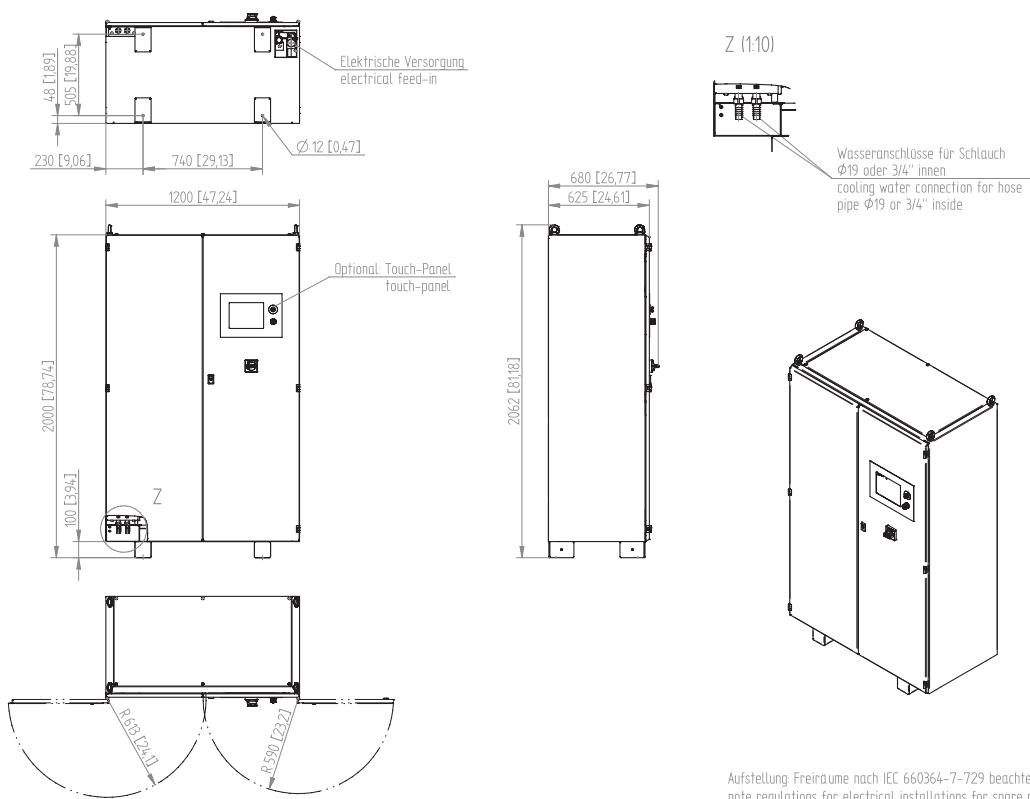


Aufstellung: Freiräume nach IEC 660364-7-729 beachten.
note regulations for electrical installations for spare requirement
for service and maintenance.


MECHANICAL SPECIFICATIONS

DC 080 Standard

Laser Head

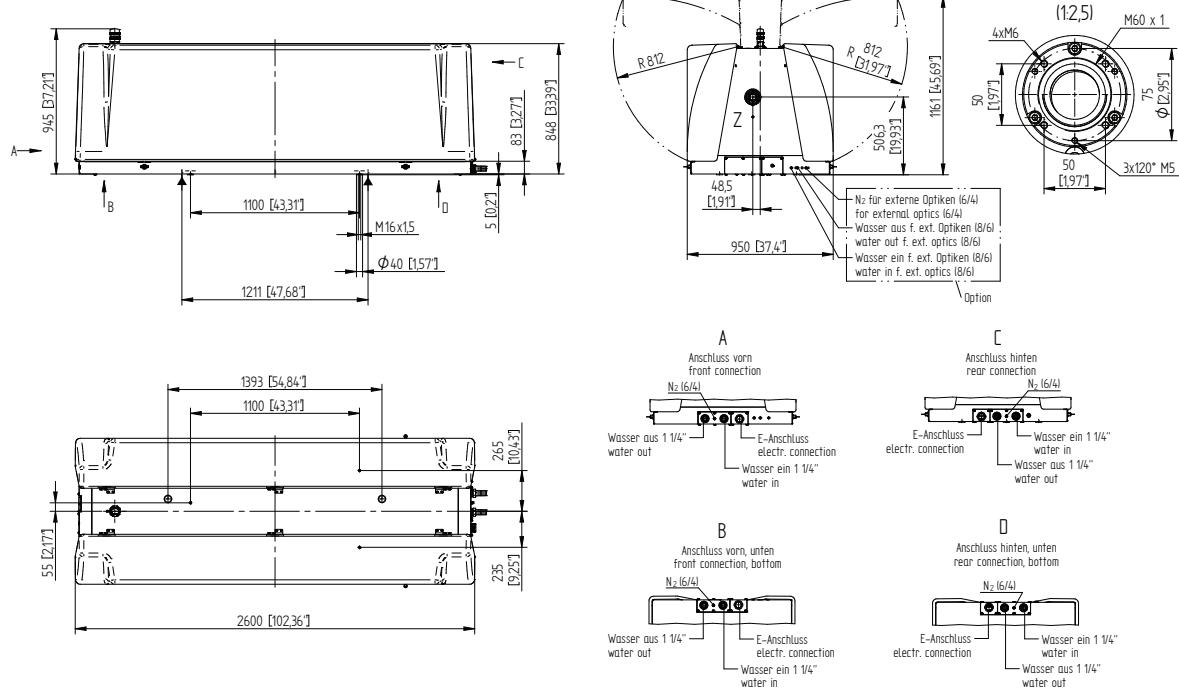


Cabinet

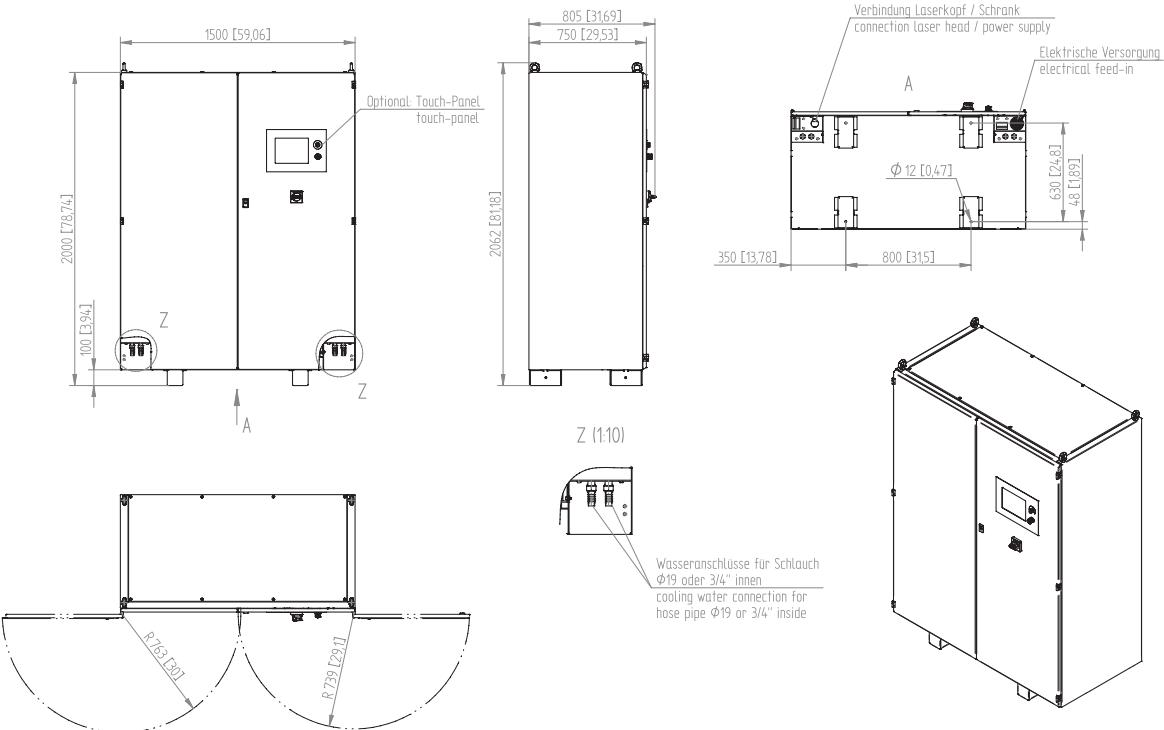

Austellung: Freiräume nach IEC 660364-7-729 beachten.
note regulations for electrical installations for spare requirement for service and maintenance.

MECHANICAL SPECIFICATIONS

DC 060 - DC 080 Compact

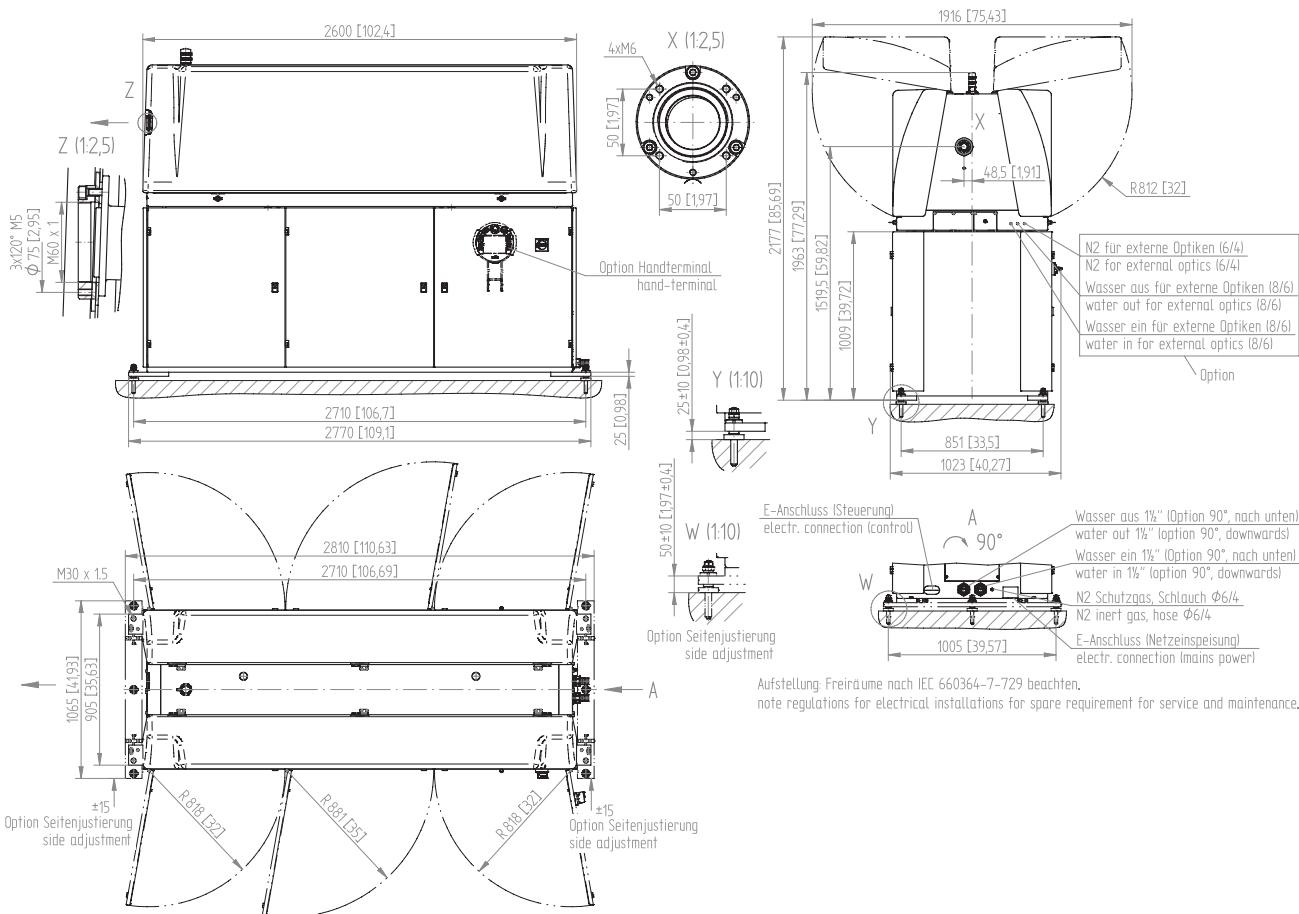

Coherent, Inc.,
5100 Patrick Henry Drive Santa Clara, CA 95054
p. (800) 527-3786 | (408) 764-4983
f. (408) 764-4646

tech.sales@Coherent.com www.Coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent offers a limited warranty for all HighLight Lasers. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.
Printed in the U.S.A. MC-013-19-0M0619 Copyright ©2019 Coherent, Inc.



VISIBLE AND/OR INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR SCATTERED RADIATION

MODEL: ROFIN DC CO2 LASER
MAXIMUM OUTPUT: 10000 WATTS CW @ 10.6 μm
1.5 JOULE MAX. 100 μSEC PULSE
CLASS IV LASER PRODUCT

IF ALIGNMENT LASER DIODE INSTALLED
CLASS II LASER RADIATION ALSO EMITTED.
DO NOT STARE INTO LASER DIODE BEAM.
MAXIMUM OUTPUT: 1.0mW CW / WAVELENGTH: 633nm



Coherent-Rofin industrial lasers are designed in strict accordance with the respective safety regulations. We certify that each laser manufactured by our company complies with FDA Radiation Performance Standards, 21 CFR Subchapter J and with IEC 60825. Warning labels as shown in the figure appear on each Coherent-Rofin laser to indicate the respective classification.