




## LPY SERIES

High and Ultra-High Energy Q-Switched Nd:YAG Lasers

2 0 2 2

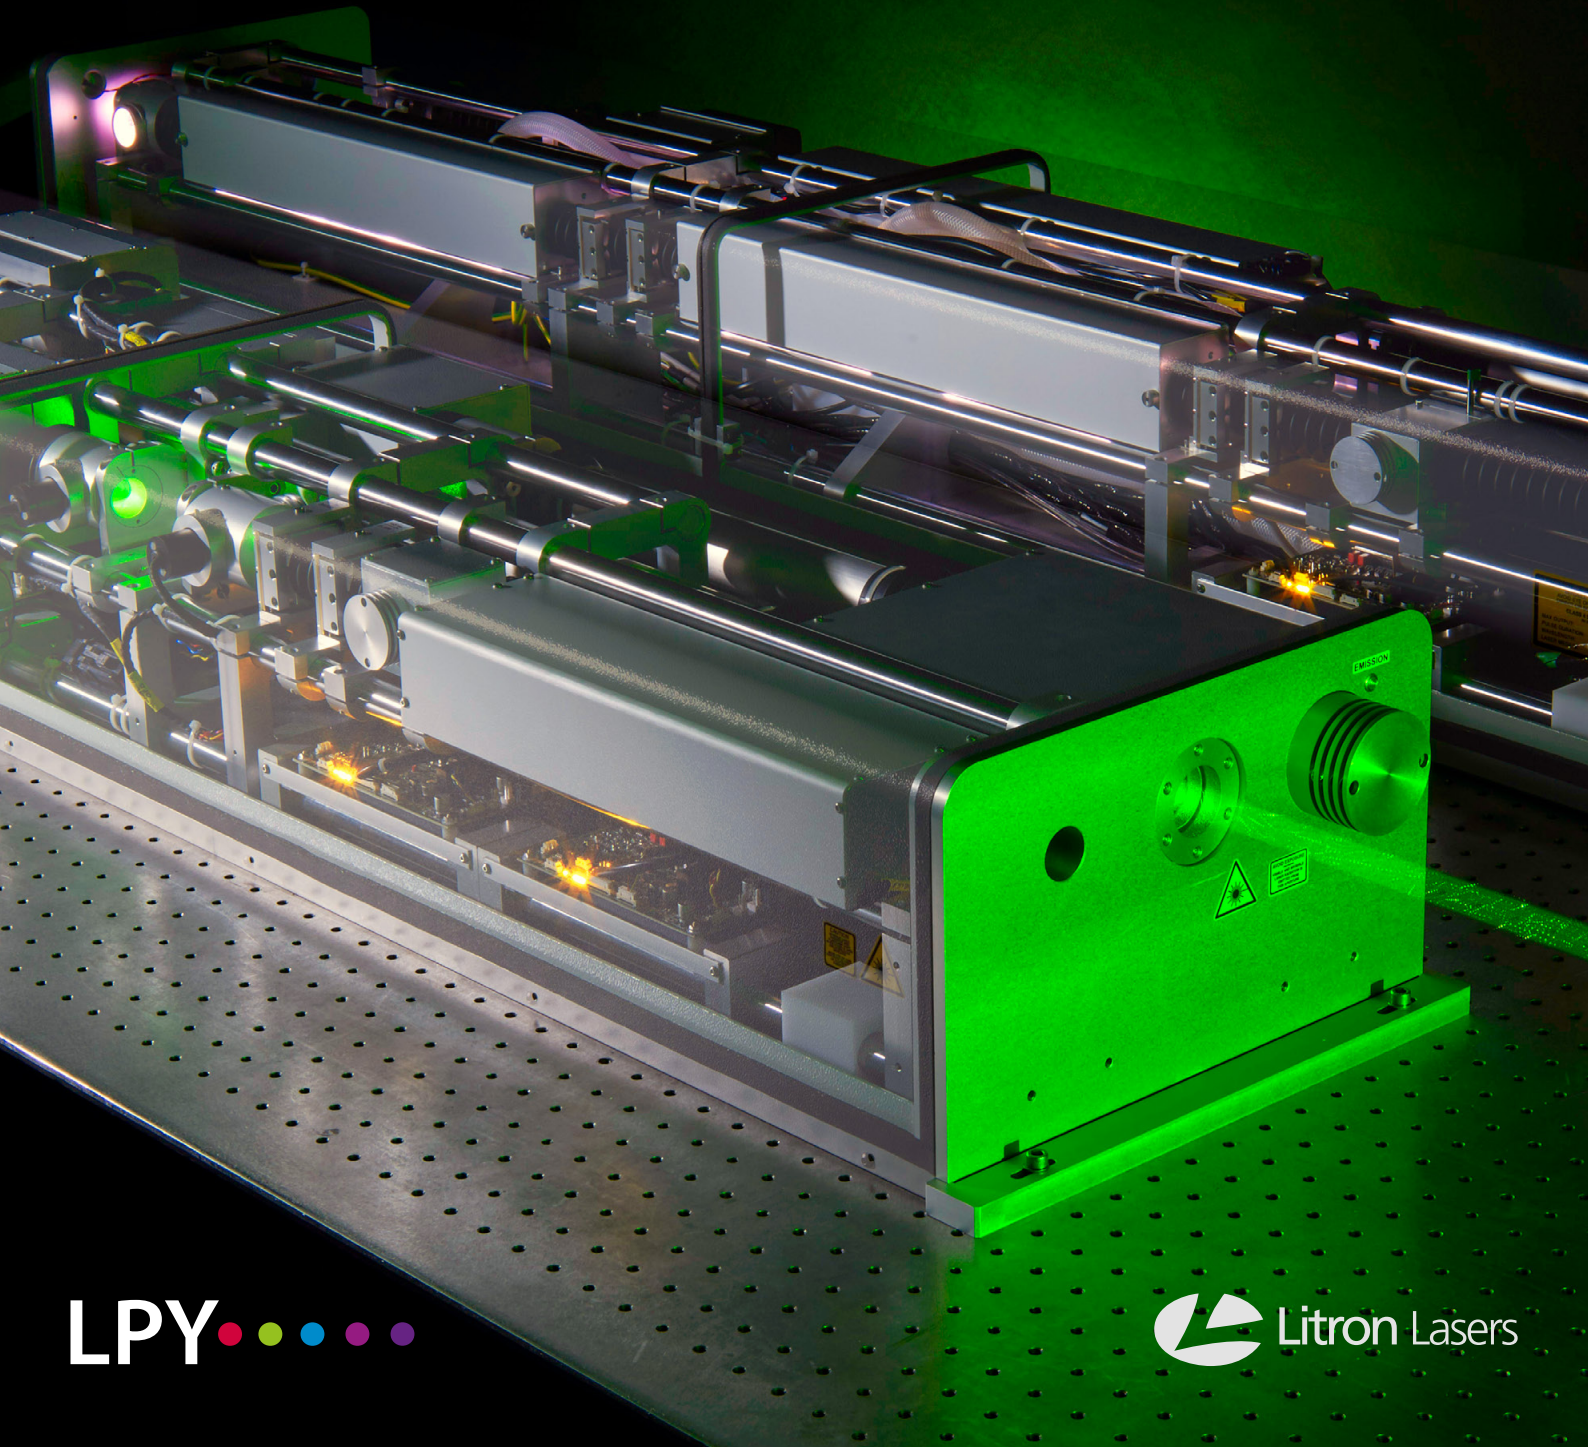

LPY ● ● ● ● ●


 Litron Lasers

# LPY Series

Superior performance through superior design

## APPLICATIONS

- *Dye, OPO and Ti:Sa pumping*
- *Spectroscopy*
- *LIBS*
- *LIDAR*
- *Laser Shock Peening*
- *Pulsed Laser Deposition*
- *Thomson Scattering*

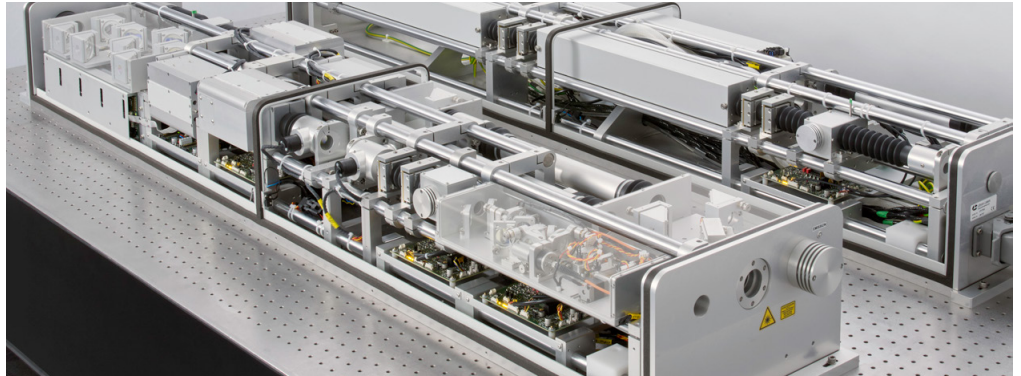

## The Evolution of the LPY Range

The LPY series of pulsed Nd:YAG lasers was designed to suit almost any industrial or research application requiring a high-energy or high-specification Nd:YAG laser. A 'no-compromise' design approach is evident in the build quality, a parameter that sets these lasers well apart from any of their competitors.



## LPY Concept – Cost effective Customisation

The LPY Series is built on the industrial Invar space frame platform, which offers incredible stability. The modular nature of this design enables complete customisation, allowing the customer to specify a laser system that is truly fit for purpose. The design also allows for easy maintenance when replacing consumable parts such as flashlamps to ensure minimal downtime.


The modular design of the laser head allows a wide variety of resonator configurations and options to be offered, from single rod oscillators to fully birefringence-compensating twin-rod-oscillator, twin-rod-amplifier systems. Furthermore, a choice of stable, stable-telescopic or graded reflectivity resonators is available, allowing the customer to specify a system that best suits their requirements.

## Configurable features include

- Specification of cavity type i.e. stable, super-Gaussian, telescopic
- Injection seeding to reduce the linewidth of the output
- Harmonic generation modules for 532, 355, 266 and 213nm
- Process shutters for repeatable output energy from the first shot
- Sealed case to stop ingress of dust and dirt
- Complete software control with easy integration into proprietary software including LabView
- Bespoke conduit length

## Litron Ultra-High Energy Lasers – Extending Outputs to 10J

In designing the Ultra-High Energy range of laser systems, Litron built on the already robust and reliable LPY platform. Many new features evolved to complement the industry proven LPY designs offering Q-switched outputs up to 10J at 1064nm.

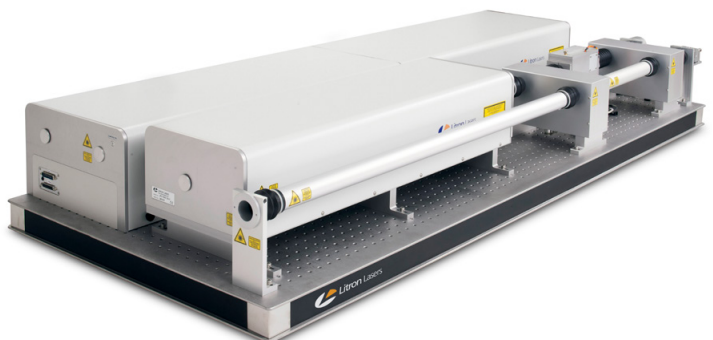

## Advanced Features and Benefits Include

### Full System Monitoring

All lasers feature a fully integrated control system that monitors many system parameters ensuring reliable operation. A comprehensive interlock suite coupled with touchscreen control and reporting ensure that the user is in full control of the laser and in full knowledge of its performance.

### Remote Automation and Ease of Integration

With a host of interface options such as RS232, ethernet and CAN, and a full software suite with necessary drivers and LabView integration, the LPY series offers an unprecedented ease of use for both industrial systems integrators and researchers alike.

### Motorised Harmonic Generation Stages

All harmonics are available with optional auto-tracking and auto-tuning. The system will automatically peak the output energy at startup or on request. Auto-tracking continuously seeks to maximise the output energy during operation whereas auto-tuning will maximise the output upon request.

### Motorised Harmonic Separation and Switching

Motorised harmonic switching allows for remote switching between output wavelengths. When used in unison with the motorised harmonic generation and motorised mirror stages, each configurable wavelength can be selected and optimised remotely at the push of a button.

### Fibre Delivered Seeder

With the addition of an injection seeder, output linewidths of  $0.0016\text{cm}^{-1}$  are possible. The use of a high stability, high power single longitudinal mode (SLM) seed laser gives unsurpassed lock for continuous SLM output. Litron offers both true  $\text{TEM}_{00}$  and super-Gaussian-coupled resonator options with injection seeding.

### Line Narrowing

Line-narrowing etalons allow the linewidth of the laser output to be reduced for increased coherence length. In a stable resonator, the use of an output-coupling etalon gives a linewidth of approximately  $0.3\text{cm}^{-1}$  and an additional intra-cavity etalon will reduce the linewidth to approximately  $0.06\text{cm}^{-1}$ . In a super-Gaussian-coupled resonator an intracavity etalon will reduce the linewidth to approximately  $0.15\text{cm}^{-1}$ .

### Integrated Energy Monitor and Closed-Loop Stabilisation

A calibrated photodiode enables accurate energy monitoring of the output energy and optional closed-loop stabilisation of the laser and harmonic outputs.

### Variable Optical Attenuator


A variable optical attenuator is useful if the temporal profile of the pulse needs to be maintained at different output energies. The use of a half-wave plate and polariser allows continuous adjustment of the output energy with negligible effect on either the spatial or temporal pulse characteristics. Attenuators are available for both 1064nm and harmonic wavelengths.

### Options for Systems Integrators


The inherent strength and stability of the LPY construction very easily lends itself to securely mounting beam handling solutions such as articulated arms or galvo scanning heads.



LUCi touchscreen

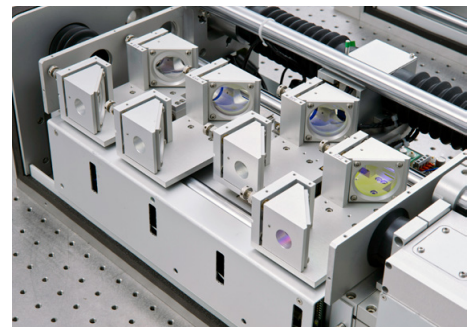

Motorised harmonics

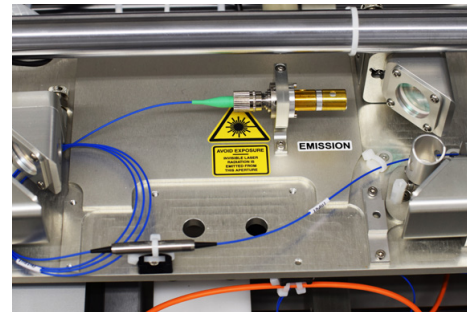

Fibre delivered injection seeder



Integrated energy monitoring

# LPY600/700 Series

## High Energy Pulsed Nd:YAG Lasers

### TECHNICAL DATA

#### Stable and Stable Telescopic Resonators 10-20Hz Repetition Rate

| Model                                      | LPY704-10                 | LPY706-10                 | LPY664-10         | LPY674-10         | LPY764-10         | LPY776-10         | LPY787-10         |
|--|---------------------------|---------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Repetition Rate (Hz)</b>                | 10                        | 10                        | 10                | 10                | 10                | 10                | 10                |
| <b>Output Energy (mJ)</b>                  |                           |                           |                   |                   |                   |                   |                   |
| 1064nm                                     | 420                       | 650                       | 850               | 1000              | 1250              | 1750              | 2000              |
| 532nm                                      | 210                       | 325                       | 425               | 500               | 675               | 875               | 1000              |
| 355nm <sup>(1)</sup>                       | 80                        | 100                       | 130               | 160               | 200               | 250               | 300               |
| 266nm                                      | 50                        | 70                        | 95                | 110               | 120               | 130               | 150               |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                           |                           |                   |                   |                   |                   |                   |
| 1064nm                                     | 2                         | 2                         | 2                 | 2                 | 2                 | 2                 | 2                 |
| 532nm                                      | 3                         | 3                         | 3                 | 3                 | 3                 | 3                 | 3                 |
| 355nm                                      | 4                         | 4                         | 4                 | 4                 | 4                 | 4                 | 4                 |
| 266nm                                      | 6                         | 6                         | 6                 | 6                 | 6                 | 6                 | 6                 |
| <b>Parameter</b>                           |                           |                           |                   |                   |                   |                   |                   |
| Beam Diameter (mm)                         | 6.4                       | 8.0                       | 8.0               | 9.5               | 9.5               | 12.5              | 12.5              |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.8                      | <0.8                      | <0.8              | <0.8              | <0.8              | <0.8              | <0.8              |
| M <sup>2</sup> @ 1064nm                    | <3.5                      | <3.5                      | <3.5              | <3.5              | <3.5              | <3.5              | <3.5              |
| Pulse Width @ 1064nm (ns)                  | 6-10                      | 6-10                      | 6-10              | 6-10              | 6-10              | 6-10              | 6-10              |
| Pointing Stability (µrad) <sup>(4)</sup>   | <35                       | <35                       | <35               | <35               | <35               | <35               | <35               |
| Lamp Life (Pulses) <sup>(5)</sup>          | 5x10 <sup>7</sup>         | 5x10 <sup>7</sup>         | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                      | <0.5                      | <0.5              | <0.5              | <0.5              | <0.5              | <0.5              |
| <b>Services</b>                            |                           |                           |                   |                   |                   |                   |                   |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                   | 220-250                   | 220-250           | 220-250           | 220-250           | 220-250           | 220-250           |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60                  | 50 or 60                  | 50 or 60          | 50 or 60          | 50 or 60          | 50 or 60          | 50 or 60          |
| Power Phase                                | Single                    | Single                    | Single            | Single            | Single            | Single            | Single            |
| Water Temp Max. (°C)                       | Air Cooled <sup>(9)</sup> | Air Cooled <sup>(9)</sup> | 20                | 20                | 20                | 20                | 20                |
| Inlet Pressure (bar)                       | n/a                       | n/a                       | 2-5               | 2-5               | 2-5               | 2-5               | 2-5               |
| <b>PSU Type</b>                            | LPU1000                   | 16U Rack                  | 16U Rack          | 16U Rack          | 16U Rack          | 16U Rack          | 16U Rack          |

| Model                                      | LPY704-20                 | LPY706-20         | LPY664-20         | LPY674-20         | LPY64-20          |
|--|---------------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Repetition Rate (Hz)</b>                | 20                        | 20                | 20                | 20                | 20                |
| <b>Output Energy (mJ)</b>                  |                           |                   |                   |                   |                   |
| 1064nm                                     | 380                       | 600               | 800               | 850               | 1000              |
| 532nm                                      | 190                       | 300               | 400               | 425               | 500               |
| 355nm <sup>(1)</sup>                       | 70                        | 85                | 110               | 130               | 140               |
| 266nm                                      | 35                        | 65                | 75                | 80                | 90                |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                           |                   |                   |                   |                   |
| 1064nm                                     | 2                         | 2                 | 2                 | 2                 | 2                 |
| 532nm                                      | 3                         | 3                 | 3                 | 3                 | 3                 |
| 355nm                                      | 4                         | 4                 | 4                 | 4                 | 4                 |
| 266nm                                      | 6                         | 6                 | 6                 | 6                 | 6                 |
| <b>Parameter</b>                           |                           |                   |                   |                   |                   |
| Beam Diameter (mm)                         | 6.4                       | 8.0               | 8.0               | 9.5               | 8.0               |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.8                      | <0.8              | <0.8              | <0.8              | <0.8              |
| M <sup>2</sup> @ 1064nm                    | <3.5                      | <3.5              | <3.5              | <3.5              | <3.5              |
| Pulse Width @ 1064nm (ns)                  | 6-10                      | 6-10              | 6-10              | 6-10              | 6-10              |
| Pointing Stability (µrad) <sup>(4)</sup>   | <35                       | <35               | <35               | <35               | <35               |
| Lamp Life (Pulses) <sup>(5)</sup>          | 5x10 <sup>7</sup>         | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                      | <0.5              | <0.5              | <0.5              | <0.5              |
| <b>Services</b>                            |                           |                   |                   |                   |                   |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                   | 220-250           | 220-250           | 220-250           | 220-250           |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60                  | 50 or 60          | 50 or 60          | 50 or 60          | 50 or 60          |
| Power Phase                                | Single                    | Single            | Single            | Single            | Single            |
| Water Temp Max. (°C)                       | Air Cooled <sup>(9)</sup> | 20                | 20                | 20                | 20                |
| Inlet Pressure (bar)                       | n/a                       | 2-5               | 2-5               | 2-5               | 2-5               |
| <b>PSU Type</b>                            | LPU1000                   | 16U Rack          | 16U Rack          | 16U Rack          | 16U Rack          |

- (1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.
- (2) Peak-to-Peak Energy - 99% of pulses.
- (3) Full angle for 90% of the output energy.
- (4) Half angle.
- (5) Typical lifetime.
- (6) Jitter is measured with respect to the Q-switch trigger input.
- (7) 110VAC option requires autotransformer to be specified on order.
- (8) 50 or 60Hz to be specified on order.
- (9) Ambient temperature 5-35°C. (0 to 80% non-condensing atmosphere.)

LPY700 series systems feature a birefringence compensating twin rod oscillator design.  
 LPY600 series are single rod oscillator/oscillator-amplifiers.

## Stable and Stable Telescopic Resonators 30-50Hz Repetition Rate

| Model                                      | LPY704-30                 | LPY706-30                 | LPY764-30         | LPY774-30         | LPY787-30         | LPY704-50         | LPY742-50         |
|--|---------------------------|---------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Repetition Rate (Hz)</b>                | 30                        | 30                        | 30                | 30                | 30                | 50                | 50                |
| <b>Output Energy (mJ)</b>                  |                           |                           |                   |                   |                   |                   |                   |
| 1064nm                                     | 380                       | 550                       | 900               | 1200              | 1500              | 300               | 450               |
| 532nm                                      | 190                       | 225                       | 450               | 600               | 750               | 150               | 225               |
| 355nm <sup>(1)</sup>                       | 50                        | 80                        | 150               | 200               | 250               | 40                | 80                |
| 266nm                                      | 45                        | 60                        | 80                | 100               | 120               | 20                | 35                |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                           |                           |                   |                   |                   |                   |                   |
| 1064nm                                     | 2                         | 2                         | 2                 | 2                 | 2                 | 2                 | 2                 |
| 532nm                                      | 3                         | 3                         | 3                 | 3                 | 3                 | 3                 | 3                 |
| 355nm                                      | 4                         | 4                         | 4                 | 4                 | 4                 | 4                 | 4                 |
| 266nm                                      | 6                         | 6                         | 6                 | 6                 | 6                 | 6                 | 6                 |
| <b>Parameter</b>                           |                           |                           |                   |                   |                   |                   |                   |
| Beam Diameter (mm)                         | 6.4                       | 8.0                       | 8.0               | 9.5               | 12.5              | 6.4               | 12.5              |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.8                      | <0.8                      | <0.8              | <0.8              | <0.8              | <0.8              | <0.8              |
| Pulse Width @ 1064nm (ns)                  | 8-10                      | 8-10                      | 8-10              | 8-10              | 8-10              | 8-10              | 8-10              |
| Pointing Stability (μrad) <sup>(4)</sup>   | <35                       | <35                       | <35               | <35               | <35               | <35               | <35               |
| Lamp Life (Pulses) <sup>(5)</sup>          | 5x10 <sup>7</sup>         | 5x10 <sup>7</sup>         | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> | 5x10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                      | <0.5                      | <0.5              | <0.5              | <0.5              | <0.5              | <0.5              |
| <b>Services</b>                            |                           |                           |                   |                   |                   |                   |                   |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                   | 220-250                   | 220-250           | 220-250           | 220-250           | 220-250           | 220-250           |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60                  | 50 or 60                  | 50 or 60          | 50 or 60          | 50 or 60          | 50 or 60          | 50 or 60          |
| Power Phase                                | Single                    | Single                    | Single            | Single            | Single            | Single            | Single            |
| Water Temp Max. (°C)                       | Air Cooled <sup>(9)</sup> | Air Cooled <sup>(9)</sup> | 20                | 20                | 20                | 20                | 20                |
| Inlet Pressure (bar)                       | n/a                       | n/a                       | 2-5               | 2-5               | 2-5               | 2-5               | 2-5               |
| <b>PSU Type</b>                            | LPU1000                   | LPU1000                   | 16U Rack          | 16U Rack          | 16U Rack          | 16U Rack          | 16U Rack          |

## LPY600 Stable Telescopic Resonators with TEM<sub>00</sub> Output

| Model                                      | LPY604T-10                    | LPY604T-20       | LPY642T-10       | LPY642T-20       | LPY642T-30       |
|--|-------------------------------|------------------|------------------|------------------|------------------|
|  | True TEM <sub>00</sub> Output |                  |                  |                  |                  |
| <b>Repetition Rate (Hz)</b>                | 10                            | 20               | 10               | 20               | 30               |
| <b>Output Energy (mJ)</b>                  |                               |                  |                  |                  |                  |
| 1064nm                                     | 80                            | 70               | 350              | 300              | 250              |
| 532nm                                      | 40                            | 35               | 175              | 150              | 125              |
| 355nm <sup>(1)</sup>                       | 20                            | 15               | 80               | 70               | 65               |
| 266nm                                      | 15                            | 10               | 40               | 30               | 25               |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                               |                  |                  |                  |                  |
| 1064nm                                     | 2                             | 2                | 2                | 2                | 2                |
| 532nm                                      | 3                             | 3                | 3                | 3                | 3                |
| 355nm                                      | 4                             | 4                | 4                | 4                | 4                |
| 266nm                                      | 6                             | 6                | 6                | 6                | 6                |
| <b>Parameter</b>                           |                               |                  |                  |                  |                  |
| Beam Diameter (mm)                         | 6.4                           | 6.4              | 6.4              | 6.4              | 6.4              |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.8                          | <0.8             | <0.8             | <0.8             | <0.8             |
| M <sup>2</sup> @1064nm                     | <1.3                          | <1.3             | <1.3             | <1.3             | <1.3             |
| Pulse Width @ 1064nm (ns)                  | 6-10                          | 6-10             | 6-10             | 6-10             | 6-10             |
| Pointing Stability (μrad) <sup>(4)</sup>   | <35                           | <35              | <35              | <35              | <35              |
| Lamp Life (Pulses) <sup>(5)</sup>          | <10 <sup>7</sup>              | <10 <sup>7</sup> | <10 <sup>7</sup> | <10 <sup>7</sup> | <10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                          | <0.5             | <0.5             | <0.5             | <0.5             |
| <b>Services</b>                            |                               |                  |                  |                  |                  |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                       | 220-250          | 220-250          | 220-250          | 220-250          |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60                      | 50 or 60         | 50 or 60         | 50 or 60         | 50 or 60         |
| Power Phase                                | Single                        | Single           | Single           | Single           | Single           |
| Water Temp Max. (°C)                       | 20                            | 20               | 20               | 20               | 20               |
| Inlet Pressure (bar)                       | 2-5                           | 2-5              | 2-5              | 2-5              | 2-5              |
| <b>PSU Type</b>                            | 16U Rack                      | 16U Rack         | 16U Rack         | 16U Rack         | 16U Rack         |

- (1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.
- (2) Peak-to-Peak Energy - 99% of pulses.
- (3) Full angle for 90% of the output energy.
- (4) Half angle.
- (5) Typical lifetime.
- (6) Jitter is measured with respect to the Q-switch trigger input.
- (7) 110VAC option requires autotransformer to be specified on order.
- (8) 50 or 60Hz to be specified on order.
- (9) Ambient temperature 5-35°C. (0 to 80% non-condensing atmosphere.)

# LPY600/700 Series

## High Energy Pulsed Nd:YAG Lasers

### TECHNICAL DATA

#### Stable Resonators 100-200Hz Repetition Rate

| Model                                      | LPY702-100          | LPY704-100          | LPY742-100          | LPY702-150          | LPY742-150          | LPY702-200          | LPY742-200          |
|--|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| <b>Repetition Rate (Hz)</b>                | 100                 | 100                 | 100                 | 150                 | 150                 | 200                 | 200                 |
| <b>Output Energy (mJ)</b>                  |                     |                     |                     |                     |                     |                     |                     |
| 1064nm                                     | 100                 | 230                 | 400                 | 90                  | 280                 | 70                  | 200                 |
| 532nm                                      | 50                  | 115                 | 200                 | 45                  | 140                 | 35                  | 100                 |
| 355nm <sup>(1)</sup>                       | 20                  | 20                  | 70                  | 12                  | 30                  | 10                  | 30                  |
| 266nm                                      | 10                  | 15                  | 20                  | 7                   | 18                  | 6                   | 10                  |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                     |                     |                     |                     |                     |                     |                     |
| 1064nm                                     | 2                   | 2                   | 2                   | 2                   | 2                   | 2                   | 2                   |
| 532nm                                      | 3                   | 3                   | 3                   | 3                   | 3                   | 3                   | 3                   |
| 355nm                                      | 4                   | 4                   | 4                   | 4                   | 4                   | 4                   | 4                   |
| 266nm                                      | 6                   | 6                   | 6                   | 6                   | 6                   | 6                   | 6                   |
| <b>Parameter</b>                           |                     |                     |                     |                     |                     |                     |                     |
| Beam Diameter (mm)                         | 4.0                 | 6.4                 | 6.4                 | 5.0                 | 5.0                 | 4.0                 | 6.4                 |
| Beam Divergence (mrad) <sup>(3)</sup>      | <5                  | <5                  | <5                  | <5                  | <5                  | <5                  | <5                  |
| Pulse Width @ 1064nm (ns)                  | 10-12               | 11-18               | 10-12               | 10-15               | 10-15               | 10-15               | 10-15               |
| Pointing Stability (µrad) <sup>(4)</sup>   | <50                 | <50                 | <50                 | <50                 | <50                 | <50                 | <50                 |
| Lamp Life (Pulses) <sup>(5)</sup>          | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                | <0.5                | <0.5                | <0.5                | <0.5                | <0.5                | <0.5                |
| <b>Services</b>                            |                     |                     |                     |                     |                     |                     |                     |
| Voltage (VAC) <sup>(7)</sup>               | 220-250             | 220-250             | 220-250             | 220-250             | 220-250             | 220-250             | 220-250             |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60            | 50 or 60            | 50 or 60            | 50 or 60            | 50 or 60            | 50 or 60            | 50 or 60            |
| Power Phase                                | Single              | Single              | Single              | Single              | Single              | Single              | Single              |
| Water Temp Max. (°C)                       | 20                  | 20                  | 20                  | 20                  | 20                  | 20                  | 20                  |
| Inlet Pressure (bar)                       | 2-5                 | 2-5                 | 2-5                 | 2-5                 | 2-5                 | 2-5                 | 2-5                 |
| <b>PSU Type</b>                            | 16U Rack            | 16U Rack            | 16U Rack            | 16U Rack            | 16U Rack            | 16U Rack            | 16U Rack            |

#### Super-Gaussian Resonators 10Hz Repetition Rate

| Model                                      | LPY704G-10                | LPY706G-10                | LPY707G-10                | LPY674G-10         | LPY764G-10         | LPY776G-10         | LPY787G-10         |
|--|---------------------------|---------------------------|---------------------------|--------------------|--------------------|--------------------|--------------------|
| <b>Repetition Rate (Hz)</b>                | 10                        | 10                        | 10                        | 10                 | 10                 | 10                 | 10                 |
| <b>Output Energy (mJ)</b>                  |                           |                           |                           |                    |                    |                    |                    |
| 1064nm                                     | 400                       | 650                       | 850                       | 1000               | 1250               | 1600               | 2000               |
| 532nm                                      | 200                       | 325                       | 435                       | 500                | 675                | 820                | 1000               |
| 355nm <sup>(1)</sup>                       | 80                        | 110                       | 150/230                   | 250                | 225                | 320/490            | 400                |
| 266nm                                      | 50                        | 70                        | 105                       | 110                | 125                | 160                | 195                |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                           |                           |                           |                    |                    |                    |                    |
| 1064nm                                     | <2                        | <2                        | <2                        | <2                 | <2                 | <2                 | <2                 |
| 532nm                                      | <4                        | <4                        | <4                        | <4                 | <4                 | <4                 | <4                 |
| 355nm                                      | <6                        | <6                        | <6                        | <6                 | <6                 | <6                 | <6                 |
| 266nm                                      | <8                        | <8                        | <8                        | <8                 | <8                 | <8                 | <8                 |
| <b>Parameter</b>                           |                           |                           |                           |                    |                    |                    |                    |
| Beam Diameter (mm)                         | 6.4                       | 8.0                       | 9.5                       | 9.5                | 9.5                | 12.5               | 12.5               |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.5                      | <0.5                      | <0.5                      | <0.5               | <0.5               | <0.5               | <0.5               |
| M <sup>2</sup> @ 1064nm                    | <2                        | <2                        | <2                        | <2                 | <2                 | <2                 | <2                 |
| Pulse Width @ 1064nm (ns)                  | 6-9                       | 6-9                       | 6-9                       | 6-9                | 6-9                | 6-9                | 6-9                |
| Pointing Stability (µrad) <sup>(4)</sup>   | <25                       | <25                       | <25                       | <25                | <25                | <25                | <25                |
| Lamp Life (Pulses) <sup>(5)</sup>          | >5x10 <sup>7</sup>        | >5x10 <sup>7</sup>        | >3x10 <sup>7</sup>        | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                      | <0.5                      | <0.5                      | <0.5               | <0.5               | <0.5               | <0.5               |
| <b>Services</b>                            |                           |                           |                           |                    |                    |                    |                    |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                   | 220-250                   | 220-250                   | 220-250            | 220-250            | 220-250            | 220-250            |
| Frequency (Hz) <sup>(8)</sup>              | 47-63                     | 47-63                     | 47-63                     | 50 or 60           | 50 or 60           | 50 or 60           | 50 or 60           |
| Power Phase                                | Single                    | Single                    | Single                    | Single             | Single             | Single             | Single             |
| Water Temp Max. (°C)                       | Air Cooled <sup>(9)</sup> | Air Cooled <sup>(9)</sup> | Air Cooled <sup>(9)</sup> | 20                 | 20                 | 20                 | 20                 |
| Inlet Pressure (bar)                       | n/a                       | n/a                       | n/a                       | 2-5                | 2-5                | 2-5                | 2-5                |
| <b>PSU Type</b>                            | LPU1000                   | LPU1000                   | LPU1000                   | 16U Rack           | 16U Rack           | 16U Rack           | 16U Rack           |

LPY700 series systems feature a birefringence compensating twin rod oscillator design.  
 LPY600 series are single rod oscillator/oscillator-amplifiers.

## Super-Gaussian Resonators 20Hz Repetition Rate

| Model                                      | LPY704G-20                | LPY706G-20         | LPY707G-20         | LPY674G-20         | LPY764G-20         | LPY776G-20         | LPY787G-20         |
|--|---------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| <b>Repetition Rate (Hz)</b>                | 20                        | 20                 | 20                 | 20                 | 20                 | 20                 | 20                 |
| <b>Output Energy (mJ)</b>                  |                           |                    |                    |                    |                    |                    |                    |
| 1064nm                                     | 380                       | 600                | 800                | 850                | 1000               | 1400               | 1800               |
| 532nm                                      | 190                       | 300                | 400                | 425                | 500                | 700                | 900                |
| 355nm <sup>(1)</sup>                       | 70                        | 90                 | 130                | 150                | 140                | 280                | 380                |
| 266nm                                      | 45                        | 65                 | 75                 | 80                 | 90                 | 140                | 180                |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                           |                    |                    |                    |                    |                    |                    |
| 1064nm                                     | <2                        | <2                 | <2                 | <2                 | <2                 | <2                 | <2                 |
| 532nm                                      | <4                        | <4                 | <4                 | <4                 | <4                 | <4                 | <4                 |
| 355nm                                      | <6                        | <6                 | <6                 | <6                 | <6                 | <6                 | <6                 |
| 266nm                                      | <8                        | <8                 | <8                 | <8                 | <8                 | <8                 | <8                 |
| <b>Parameter</b>                           |                           |                    |                    |                    |                    |                    |                    |
| Beam Diameter (mm)                         | 6.4                       | 8.0                | 9.5                | 9.5                | 9.5                | 12.5               | 12.5               |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.5                      | <0.5               | <0.5               | <0.5               | <0.5               | <0.5               | <0.5               |
| M <sup>2</sup> @ 1064nm                    | <2                        | <2                 | <2                 | <2                 | <2                 | <2                 | <2                 |
| Pulse Width @ 1064nm (ns)                  | 6-9                       | 6-9                | 6-9                | 6-9                | 6-9                | 6-9                | 6-9                |
| Pointing Stability (µrad) <sup>(4)</sup>   | <25                       | <25                | <25                | <25                | <25                | <25                | <25                |
| Lamp Life (Pulses) <sup>(5)</sup>          | >5x10 <sup>7</sup>        | >5x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                      | <0.5               | <0.5               | <0.5               | <0.5               | <0.5               | <0.5               |
| <b>Services</b>                            |                           |                    |                    |                    |                    |                    |                    |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                   | 220-250            | 220-250            | 220-250            | 220-250            | 220-250            | 220-250            |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60                  | 50 or 60           | 50 or 60           | 50 or 60           | 50 or 60           | 50 or 60           | 50 or 60           |
| Power Phase                                | Single                    | Single             | Single             | Single             | Single             | Single             | Single             |
| Water Temp Max. (°C)                       | Air Cooled <sup>(9)</sup> | 20                 | 20                 | 20                 | 20                 | 20                 | 20                 |
| Inlet Pressure (bar)                       | n/a                       | 2-5                | 2-5                | 2-5                | 2-5                | 2-5                | 2-5                |
| <b>PSU Type</b>                            | LPU1000                   | 16U Rack           | 16U Rack           | 16U Rack           | 16U Rack           | 16U Rack           | 16U Rack           |

## Super-Gaussian Resonators 30Hz Repetition Rate

| Model                                      | LPY704G-30                | LPY706G-30         | LPY764G-30         | LPY774G-30         | LPY787G-30         |
|--|---------------------------|--------------------|--------------------|--------------------|--------------------|
| <b>Repetition Rate (Hz)</b>                | 30                        | 30                 | 30                 | 30                 | 30                 |
| <b>Output Energy (mJ)</b>                  |                           |                    |                    |                    |                    |
| 1064nm                                     | 380                       | 550                | 900                | 1200               | 1500               |
| 532nm                                      | 190                       | 225                | 450                | 600                | 750                |
| 355nm <sup>(1)</sup>                       | 50                        | 80                 | 150                | 260                | 300                |
| 266nm                                      | 45                        | 60                 | 80                 | 120                | 150                |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                           |                    |                    |                    |                    |
| 1064nm                                     | <2                        | <2                 | <2                 | <2                 | <2                 |
| 532nm                                      | <4                        | <4                 | <4                 | <4                 | <4                 |
| 355nm                                      | <6                        | <6                 | <6                 | <6                 | <6                 |
| 266nm                                      | <10                       | <10                | <10                | <10                | <10                |
| <b>Parameter</b>                           |                           |                    |                    |                    |                    |
| Beam Diameter (mm)                         | 6.4                       | 8.0                | 9.5                | 9.5                | 12.5               |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.5                      | <0.5               | <0.5               | <0.5               | <0.5               |
| M <sup>2</sup> @ 1064nm                    | <2                        | <2                 | <2                 | <2                 | <2                 |
| Pulse Width @ 1064nm (ns)                  | 6-9                       | 6-9                | 6-9                | 6-9                | 6-9                |
| Pointing Stability (µrad) <sup>(4)</sup>   | <25                       | <25                | <25                | <25                | <25                |
| Lamp Life (Pulses) <sup>(5)</sup>          | >3x10 <sup>7</sup>        | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> | >3x10 <sup>7</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                      | <0.5               | <0.5               | <0.5               | <0.5               |
| <b>Services</b>                            |                           |                    |                    |                    |                    |
| Voltage (VAC) <sup>(7)</sup>               | 220-250                   | 220-250            | 220-250            | 220-250            | 220-250            |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60                  | 50 or 60           | 50 or 60           | 50 or 60           | 50 or 60           |
| Power Phase                                | Single                    | Single             | Single             | Single             | Single             |
| Water Temp Max. (°C)                       | Air Cooled <sup>(9)</sup> | 20                 | 20                 | 20                 | 20                 |
| Inlet Pressure (bar)                       | n/a                       | 2-5                | 2-5                | 2-5                | 2-5                |
| <b>PSU Type</b>                            | LPU1000                   | 16U Rack           | 16U Rack           | 16U Rack           | 16U Rack           |

- (1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.
- (2) Peak-to-Peak Energy - 99% of pulses.
- (3) Full angle for 90% of the output energy.
- (4) Half angle.
- (5) Typical lifetime.
- (6) Jitter is measured with respect to the Q-switch trigger input.
- (7) 110VAC option requires autotransformer to be specified on order.
- (8) 50 or 60Hz to be specified on order.
- (9) Ambient temperature 5-35°C. (0 to 80% non-condensing atmosphere.)


# LPY7000 Series

## High Energy Pulsed Nd:YAG Lasers

The **LPY7000** lasers offer extremely high energy Q-switched outputs up to 3.5J and repetition rates of up to 50Hz. Based around Litron's proven self-supporting Invar frame, the robust build quality is suitable for both industrial and scientific applications. Energies up to 10J are also available at 1064nm with extra amplification.

The lasers are provided in an oscillator, pre-amplifier, main-amplifier arrangement. The oscillator may be configured as a stable-telescopic resonator offering a low order multimode output with a smooth spatial and temporal profile, or as an unstable super-Gaussian-coupled resonator offering low divergence and focusability with slightly higher peak powers.

Lamp change is performed in a matter of minutes with no need for any re-alignment. An optional IP54 sealed case ensures that the laser is protected against the ingress of dirt and moisture when used in industrial environments.

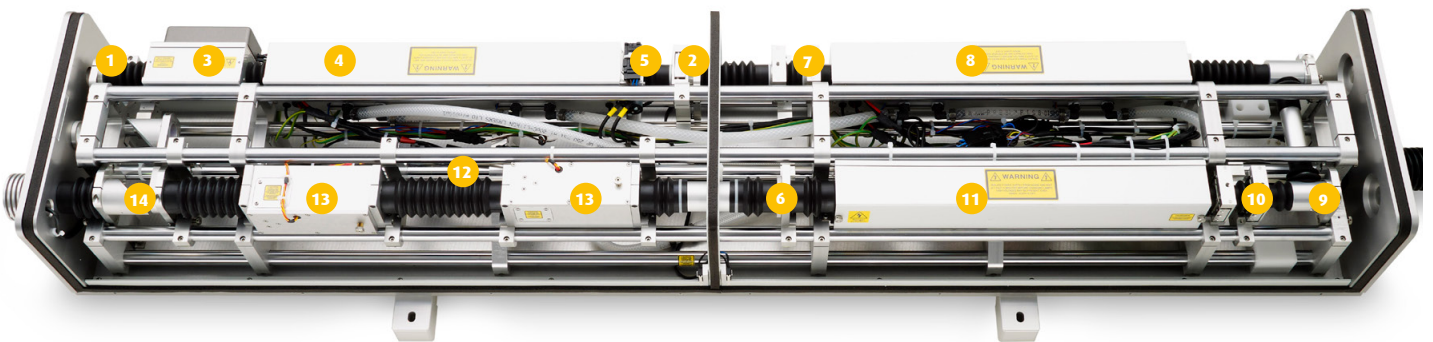

**1 Rear Mirror**

**2 Output Coupler**

**3 Electro-optic Q-Switch**

A KD\*P Pockels cell is used within the Q-switch assembly.

**4 Oscillator Pump Chamber**

All pump chambers are machined from solid 316 stainless steel. The chambers are split such that the lamp housing can be removed easily during lamp changes, leaving the rod untouched. The chambers are fitted with close coupled ceramic reflectors for efficient and uniform pumping. A proprietary filter plate protects the laser rod from UV emission from the lamp and also in the event of a lamp failure. The design of the chambers is such that a large turbulent water flow leads to very uniform cooling of the rod, essential for good pointing and overall stability.

**5 Intra-cavity Shutter**

An electronically verified, electronically actuated, intra-cavity safety shutter is standard on all of Litron's lasers.

**6 Waveplate**

**7 Expanding Telescope**

An expanding telescope is used to expand and collimate the oscillator output prior to amplification.

**8 Pre-amplifier Pump Chamber**

**9 Steering Mirrors**

**10 Expanding Telescope**

**11 Main Amplifier Pump Chambers**

The main amplifier is configured in a birefringence-compensated twin-rod topology. This minimises the depolarisation of the laser beam and leads to more uniform and more efficient harmonic generation.

**12 Invar Rail**

The lasers are built on a rugged self-supporting Invar rail. This feature sets them apart from all competitors as it is both more robust and more stable than conventional base-plate constructions. The modular nature of the rail allows for easy customisation of the lasers.

**13 Harmonic Generation Unit**

**14 Output Steering Mirrors**



## TECHNICAL DATA

### Super-Gaussian Resonators

| Model  | LPY7864-10 | LPY7864-20 | LPY7864-30 | LPY7864-50 | LPY7875-10 | LPY7875-20 |
|--|------------|------------|------------|------------|------------|------------|
| <b>Repetition Rate (Hz)</b>                                | 10         | 20         | 30         | 50         | 10         | 20         |
| <b>Output Energy (mJ)</b>                                  |            |            |            |            |            |            |
| 1064nm   | 2750       | 2250       | 2000       | 1400       | 3500       | 2750       |
| 532nm  | 1400       | 1100       | 1000       | 700        | 1750       | 1350       |
| 355nm  | 600        | 480        | 450        | 250        | 700        | 600        |
| 266nm  | 250        | 140        | 95         | 80         | 275        | 170        |
| <b>Pulse Stability (<math>\pm\%</math>) <sup>(1)</sup></b> |            |            |            |            |            |            |
| 1064nm   | 2          | 2          | 2          | 2          | 2          | 2          |
| 532nm  | 4          | 4          | 4          | 4          | 4          | 4          |
| 355nm  | 6          | 6          | 6          | 6          | 6          | 6          |
| 266nm  | 8          | 8          | 8          | 8          | 8          | 8          |
| <b>Parameter</b>   |            |            |            |            |            |            |
| Beam Diameter (mm) <sup>(2)</sup>                          | 12.5       | 12.5       | 12.5       | 12.5       | 15.0       | 15.0       |
| Beam Divergence (mrad) <sup>(3)</sup>                      | <0.5       | <0.5       | <0.5       | <0.5       | <0.5       | <0.5       |
| Pulse Width @ 1064nm (ns)                                  | 10-12      | 10-12      | 10-12      | 10-12      | 10-12      | 10-12      |
| Pointing Stability ( $\mu$ rad) <sup>(4)</sup>             | 25         | 25         | 25         | 25         | 25         | 25         |
| Timing Jitter (ns) <sup>(5)</sup>                          | <0.5       | <0.5       | <0.5       | <0.5       | <0.5       | <0.5       |
| <b>Services</b>  |            |            |            |            |            |            |
| Voltage (VAC) <sup>(6)</sup>                               | 220-250    | 220-250    | 220-250    | 220-250    | 220-250    | 220-250    |
| Frequency (Hz) <sup>(7)</sup>                              | 50 or 60   | 50 or 60   | 50 or 60   | 50 or 60   | 50 or 60   | 50 or 60   |
| Power Phase  | Single     | Single     | Single     | Single     | Single     | Single     |
| Water Temp Max. ( $^{\circ}$ C)                            | 20         | 20         | 20         | 20         | 20         | 20         |
| Inlet Pressure (bar)                                       | 2-5        | 2-5        | 2-5        | 2-5        | 2-5        | 2-5        |
| <b>PSU Type</b>  | 20U Rack   | 20U Rack   | 20U Rack   | 20U Rack   | 20U Rack   | 20U Rack   |

### Stable Telescopic Resonators

| Model  | LPY7864-10 | LPY7864-20 | LPY7864-30 | LPY7864-50 | LPY7875-10 | LPY7875-20 |
|--|------------|------------|------------|------------|------------|------------|
| <b>Repetition Rate (Hz)</b>                                | 10         | 20         | 30         | 50         | 10         | 20         |
| <b>Output Energy (mJ)</b>                                  |            |            |            |            |            |            |
| 1064nm   | 2750       | 2250       | 2000       | 1400       | 3500       | 2750       |
| 532nm  | 1400       | 1100       | 1000       | 700        | 1750       | 1350       |
| 355nm  | 385        | 315        | 280        | 195        | 490        | 385        |
| 266nm  | 250        | 140        | 95         | 80         | 275        | 170        |
| <b>Pulse Stability (<math>\pm\%</math>) <sup>(1)</sup></b> |            |            |            |            |            |            |
| 1064nm   | 2          | 2          | 2          | 2          | 2          | 2          |
| 532nm  | 4          | 4          | 4          | 4          | 4          | 4          |
| 355nm  | 6          | 6          | 6          | 6          | 6          | 6          |
| 266nm  | 8          | 8          | 8          | 8          | 8          | 8          |
| <b>Parameter</b>   |            |            |            |            |            |            |
| Beam Diameter (mm) <sup>(2)</sup>                          | 12.5       | 12.5       | 12.5       | 12.5       | 15.0       | 15.0       |
| Beam Divergence (mrad) <sup>(3)</sup>                      | <0.8       | <0.8       | <0.8       | <0.8       | <0.8       | <0.8       |
| Pulse Width @ 1064nm (ns)                                  | 12-15      | 12-15      | 12-15      | 12-15      | 12-15      | 12-15      |
| Pointing Stability ( $\mu$ rad) <sup>(4)</sup>             | 50         | 50         | 50         | 50         | 50         | 50         |
| Timing Jitter (ns) <sup>(5)</sup>                          | <0.5       | <0.5       | <0.5       | <0.5       | <0.5       | <0.5       |
| <b>Services</b>  |            |            |            |            |            |            |
| Voltage (VAC) <sup>(6)</sup>                               | 220-250    | 220-250    | 220-250    | 220-250    | 220-250    | 220-250    |
| Frequency (Hz) <sup>(7)</sup>                              | 50 or 60   | 50 or 60   | 50 or 60   | 50 or 60   | 50 or 60   | 50 or 60   |
| Power Phase  | Single     | Single     | Single     | Single     | Single     | Single     |
| Water Temp Max. ( $^{\circ}$ C)                            | 20         | 20         | 20         | 20         | 20         | 20         |
| Inlet Pressure (bar)                                       | 2-5        | 2-5        | 2-5        | 2-5        | 2-5        | 2-5        |
| <b>PSU Type</b>  | 20U Rack   | 20U Rack   | 20U Rack   | 20U Rack   | 20U Rack   | 20U Rack   |

(1) Peak-to-peak Energy - 99% of pulses.

(2) Quoted as the main amplifier rod diameter.

(3) Full angle for 90% of the output energy.

(4) Half angle.


(5) Jitter is measured with respect to the external Q-switch trigger input.

(6) 110VAC option requires autotransformer to be specified on order.

(7) 50 or 60Hz to be specified on order.

# LPY10J Series


## Ultra-High Energy Pulsed Nd:YAG Lasers

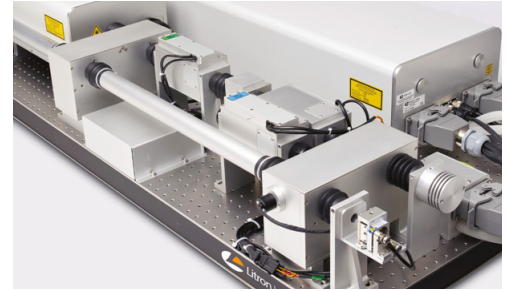


The LPY10J laser systems offer Q-switched output energies of 10J at 1064nm from a proven design platform. The self-supporting Invar frame has been utilised for many years in industrial and scientific applications where robustness and stability are paramount.

In addition to the standard configuration, there are several options available: injection seeder to provide a narrow linewidth; harmonic generation units to 266nm; automated wavelength selection; energy monitoring; automatic output peaking and continuous tracking.

### SYSTEM CONFIGURATION

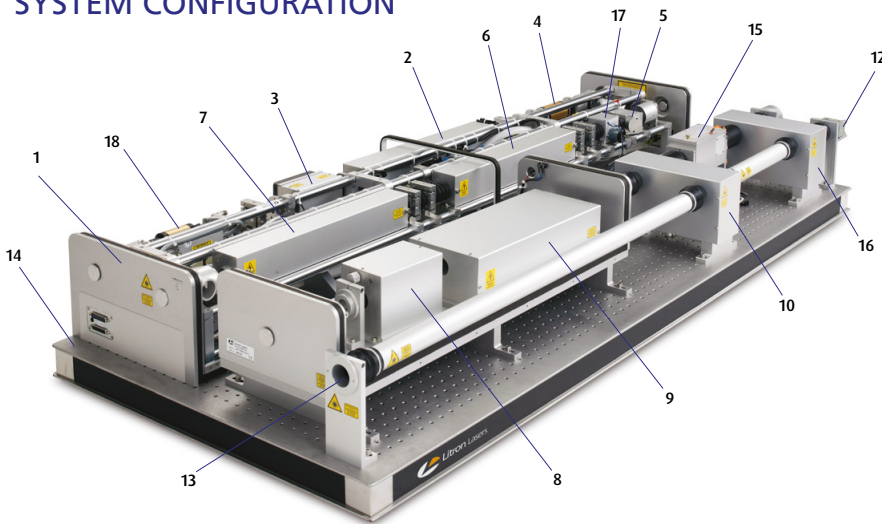

1. Invar stabilised optical rail using 8 bar self supporting format
2. Twin rod, birefringence-compensating oscillator
3. Q-switch assembly
4. Faraday isolator
5. Motorised attenuator
6. Twin rod, birefringence-compensating pre-amplifier
7. Twin rod, birefringence-compensating amplifier
8. Beam expanding telescope
9. Power amplifier stage
10. Beam switching unit for 1064nm only output
11. Connections for power supply umbilicals
12. Laser diode pointer assembly
13. Laser output port
14. Optical breadboard

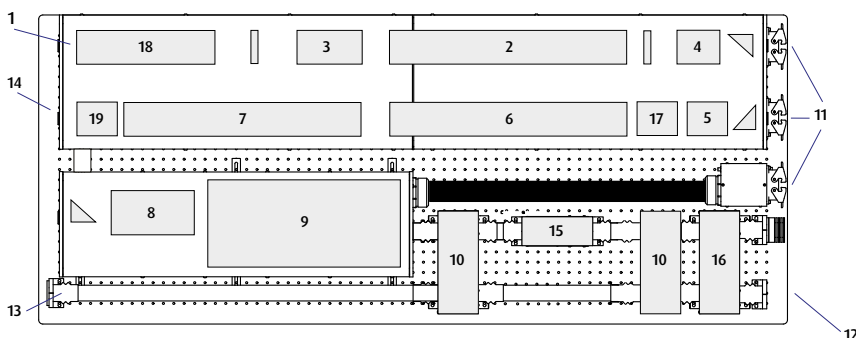


#### Optional accessories

15. Motorised second harmonic generation assembly
16. Second harmonic separation assembly
17. Beam dump shutter assembly
18. Injection seeder assembly
19. Beam switching assembly


# TECHNICAL DATA

| Model                                      | LPYG 10J-1          | LPYG 10J-5          | LPYST 10J-1         | LPYST 10J-5         |
|--|---------------------|---------------------|---------------------|---------------------|
| <b>Repetition Rate (Hz)</b>                | 1                   | 5                   | 1                   | 5                   |
| <b>Output Energy (J) <sup>(1a)</sup></b>   |                     |                     |                     |                     |
| 1064nm                                     | 10                  | 10                  | 10                  | 10                  |
| 532nm                                      | 5                   | 5                   | 5                   | 5                   |
| 355nm <sup>(1b)</sup>                      | 2.5                 | 2.5                 | 2.5                 | 2.3                 |
| 266nm                                      | 0.8                 | 0.8                 | 0.8                 | 0.5                 |
| <b>Pulse Stability (±%) <sup>(2)</sup></b> |                     |                     |                     |                     |
| 1064nm                                     | <2                  | <2                  | <2                  | <2                  |
| 532nm                                      | <4                  | <4                  | <4                  | <4                  |
| 355nm                                      | <6                  | <6                  | <6                  | <6                  |
| 266nm                                      | <10                 | <10                 | <10                 | <10                 |
| <b>Pulse Width (ns)</b>                    |                     |                     |                     |                     |
| 1064nm                                     | 7-11                | 7-11                | 20-22               | 20-22               |
| 532nm                                      | 7-11                | 7-11                | 20-22               | 20-22               |
| 355nm                                      | 6-10                | 6-10                | 19-21               | 19-21               |
| 266nm                                      | 5-9                 | 5-9                 | 18-20               | 18-20               |
| <b>Parameter</b>                           |                     |                     |                     |                     |
| System Configuration                       | Osc/Amp             | Osc/Amp             | Osc/Amp             | Osc/Amp             |
| Oscillator Configuration                   | Super-Gaussian      | Super-Gaussian      | Stable Telescopic   | Stable Telescopic   |
| Beam Diameter (mm)                         | 25                  | 25                  | 25                  | 25                  |
| Beam Divergence (mrad) <sup>(3)</sup>      | <0.5                | <0.5                | <0.8                | <0.8                |
| M <sup>2</sup>                             | <2                  | <2                  | <10                 | <10                 |
| Linewidth @ 1064nm (cm <sup>-1</sup> )     | <1                  | <1                  | <1                  | <1                  |
| Linewidth Seeded (cm <sup>-1</sup> )       | 0.003               | 0.003               | n/a                 | n/a                 |
| Pointing Stability (μrad) <sup>(4)</sup>   | ±50                 | ±50                 | ±50                 | ±50                 |
| Lamp Life (pulses) <sup>(5)</sup>          | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> | 1.5x10 <sup>8</sup> |
| Timing Jitter (ns) <sup>(6)</sup>          | <0.5                | <0.5                | <0.5                | <0.5                |
| <b>Services</b>                            |                     |                     |                     |                     |
| Voltage (VAC) <sup>(7)</sup>               | 220-250             | 220-250             | 220-250             | 220-250             |
| Power Phase                                | Single              | Single              | Single              | Single              |
| Frequency (Hz) <sup>(8)</sup>              | 50 or 60            | 50 or 60            | 50 or 60            | 50 or 60            |
| Operating Ambient Temp (°C)                | 5-30                | 5-30                | 5-30                | 5-30                |
| Laser Cooling                              | Water               | Water               | Water               | Water               |
| PSU Type                                   | 2x24U Rack          | 2x24U Rack          | 2x24U Rack          | 2x24U Rack          |

- (1a) Single wavelength output only.
- (1b) Dedicated 355nm only laser model.
- (2) Peak-to-Peak Energy - 99% of pulses.
- (3) Full angle for 90% of the output energy.
- (4) Half angle.
- (5) Typical lifetime.
- (6) RMS jitter, measured with respect to the Q-switch trigger input.
- (7) 200VAC option requires autotransformer to be specified on order.
- (8) 50 or 60Hz to be specified on order.

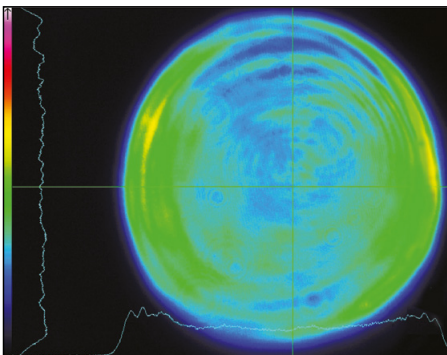

Stable telescopic beam profile at 5J, 532nm, 5Hz

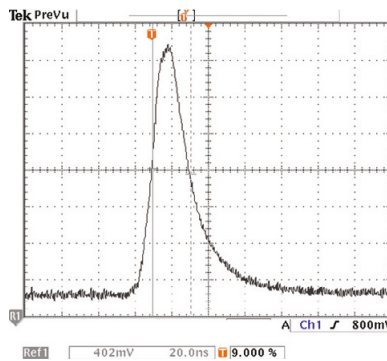


Pulsewidth at 5J, 532nm, 5Hz, 20ns FWHM


# MECHANICAL DATA

## LPY600/700


All dimensions shown in mm

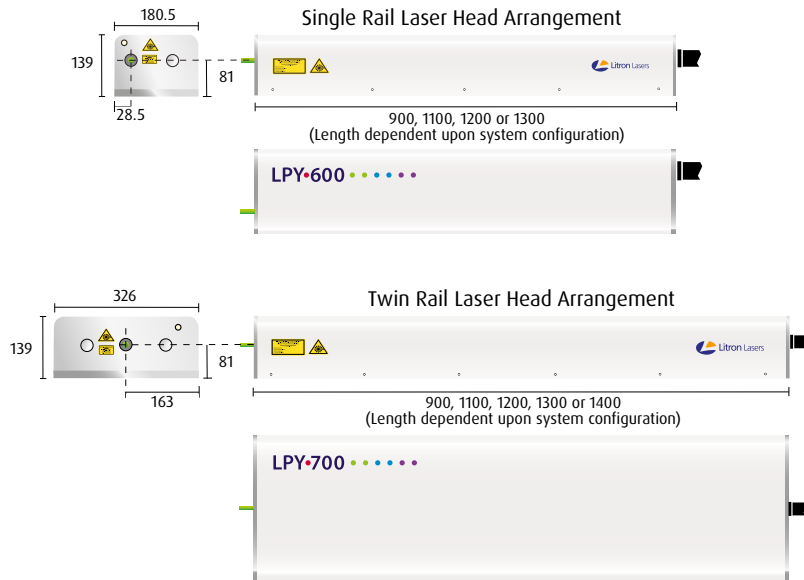

### 16U Rackmount PSU

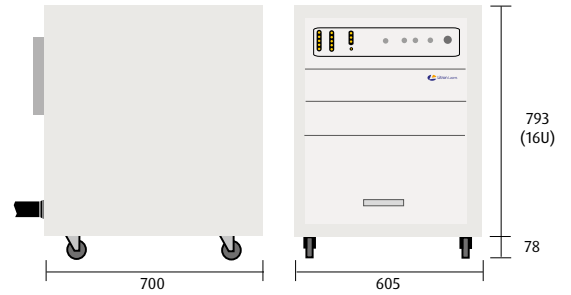


### LPU1000 PSU

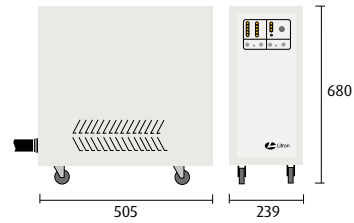


## LPY7000

All dimensions shown in mm

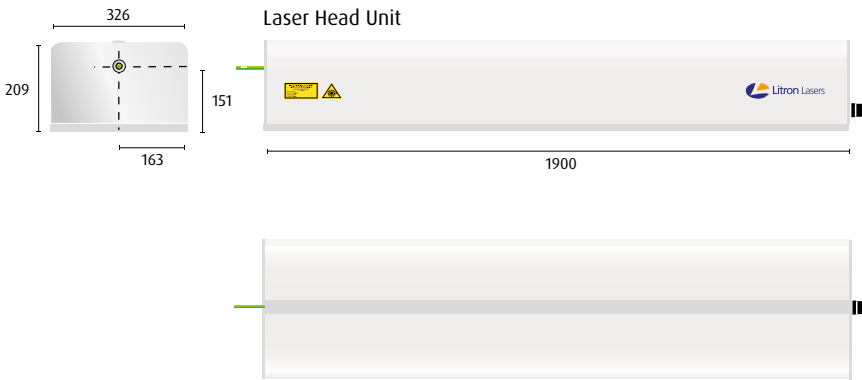


### Rackmount PSU

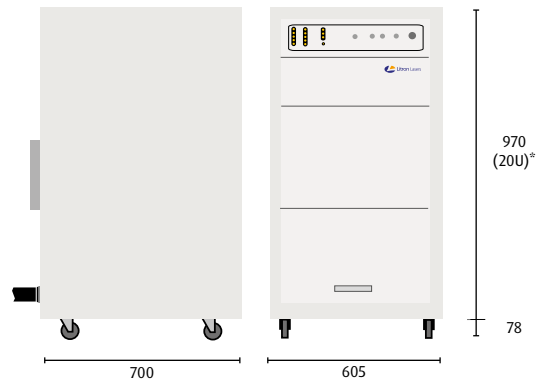

\* Extra 4U dependent on system configuration


## LPY10J

All dimensions shown in mm

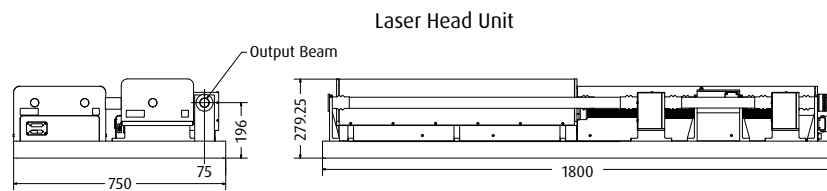

### Power Supply Unit

(2 units required for this system)

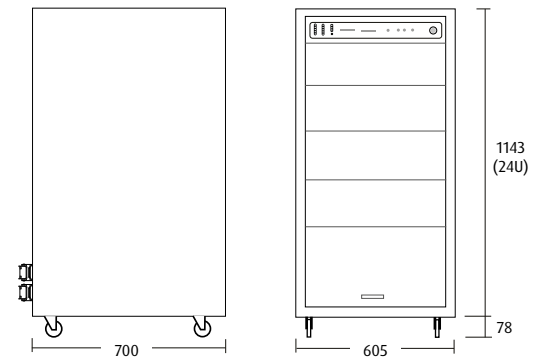

Our policy is to improve the design and specification of our products. The details given in this document are not to be regarded as binding.



**Litron Lasers Ltd**  
 8 Consul Road, Rugby,  
 Warwickshire CV21 1PB England.  
 T +44 (0)1788 574444  
 F +44 (0)1788 574888  
 E sales@litron.co.uk

