

200i

The Future of Fume Extraction



# FEATURES

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow

## SPECIFICATIONS

Voltage	120v	230v
Volume Part Number	0LX2121D	0LX2110D
Vacuum Part Number	081026ID	080026ID
Wattage	0.5kW	0.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz
Cabinet Height	1070mm	1070mm
Cabinet Width	465mm	465mm
Cabinet Depth	528mm	528mm
Cabinet Weight	60kg	60kg
Sound Level	<60dBa	<60dBa
Airflow	200m3/h	200m3/h

## INCLUDED AS STANDARD...

### FILTERS



**Main Filter**  
Code  
113505

**Description**  
HEPA/Chemical



**Pre-filter**  
Code  
111057

**Description**  
F6 Labyrinth

Find out more:



[www.purex.co.uk](http://www.purex.co.uk)



[purex@purex.co.uk](mailto:purex@purex.co.uk)



+44 (0)1405 746030

## CONNECTION KIT

*Connection kit is included  
see overleaf for options*

# OPTIONS

## Main Filter

Code:	Description:
113505H	HEPA/Chemical (Hydrophobic)
113579	HEPA/Twin Chemical
113668	HEPA/Twin Chemical
113512	HEPA/Chemical (Cleanroom)
113669	HEPA/Chemical (Cleanroom)
113508	Chemical
113809	HEPA
113513	Solvent Lock

## Main Filter

Code:	Description:
113662	Chemical Special
113505P	Chemical Special
113531	Pleated Bag

## Pre-filter

Code:	Description:
111097	F8/F9 Labyrinth


## Connection Kits

Hose End Diameter


Hose Length

Purex Inlet Diameter


Code: 100032    50mm    3m    80mm




Code: 100043    50mm    6m    80mm




Code: 120299    80mm    3m    80mm



Code: 120288    100mm    2.3m    80mm

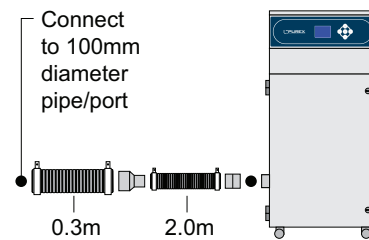


Code: 100170    32mm    1.5m    80mm



If you do not see a connection kit or soldering tip kit that fits your machine or pipework, please contact Purex or your representative

## Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options



Purex International Limited  
QWP House, Island Drive  
Capitol Park, Thorne  
Doncaster, UK  
DN8 5UE